


产品规格书

勝特力材料 886-3-5773766
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息,不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可,不得用于销售/营销/采购目的。

- 1..Electrical/电气
 - 1.1 Impedance /阻抗 50Ω
 - 1.2 Frequency /频率 DC-6GHz
 - 1.3 Dielectric withstanding voltage /介质耐压 1500V(rms)
 - 1.4 Center contact resistance /中心接触电阻 $\leq 1\text{M}\Omega$
 - 1.5 Outer contact resistance/外部接触电阻 $\leq 0.2\text{M}\Omega$
 - 1.6 Insulation resistance/绝缘电阻 $\geq 5000\text{M}\Omega$
- 2 Environmenta & Mechanical/环境与机械
 - 2.1 Temperture range/温度范围 $-45^{\circ}\sim+125^{\circ}$
 - 2.2 Rohs Compliant/符合RoHS
 - 2.3 Durability/耐久性 500cycles
- 3 Material and Plating/材料和电镀
 - 3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金
 - 3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍
 - 3.3 Insulators/绝缘体: PTFE/聚四氟乙烯

Suitable cables/适配电缆: RG316,RG174

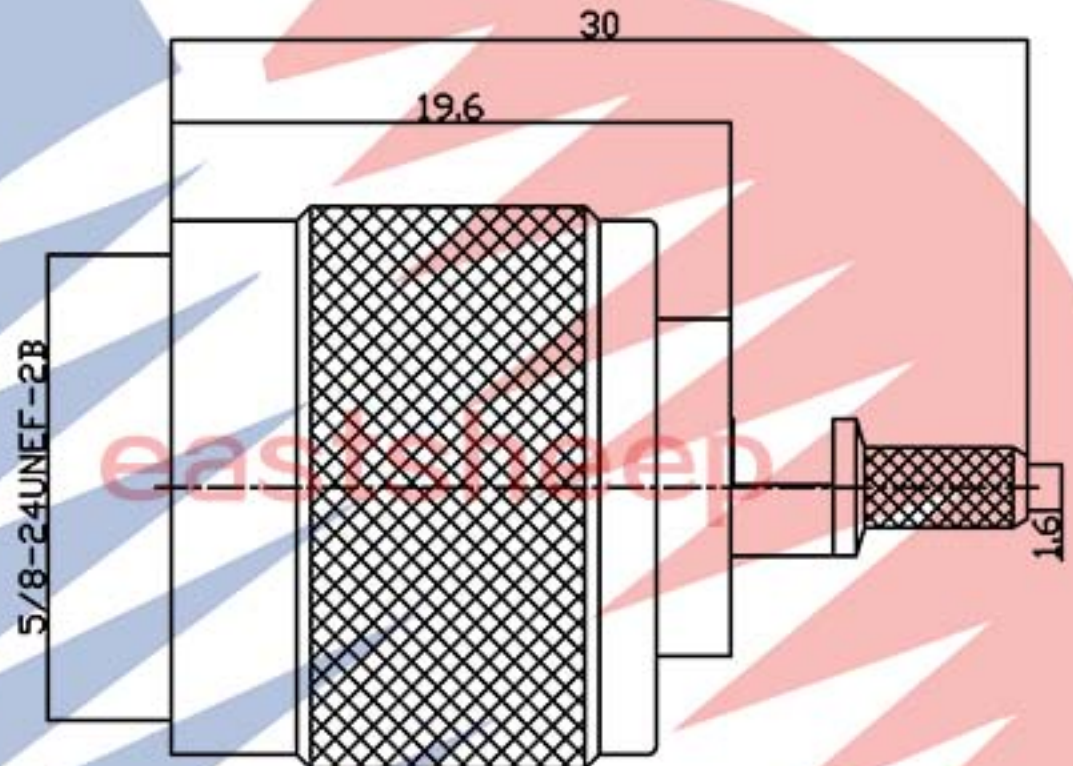

产品型号P/N: N-C-J-1.5

www.eastsheep.com