

© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECO-20-017180	07DEC2020	RZ	RS

1. FOR USE IN PANELS UP TO 6.35 [.250] MAXIMUM THICK.
2. ITEM 2 AND ITEM 3 WILL BE UNASSEMBLED AND PACKAGED SEPARATELY.
3. CENTER CONTACT PLATING THICKNESS GOLD 27u" ~ 33u"
4. CENTER CONTACT PLATING THICKNESS GOLD 5u" ~ 8u"

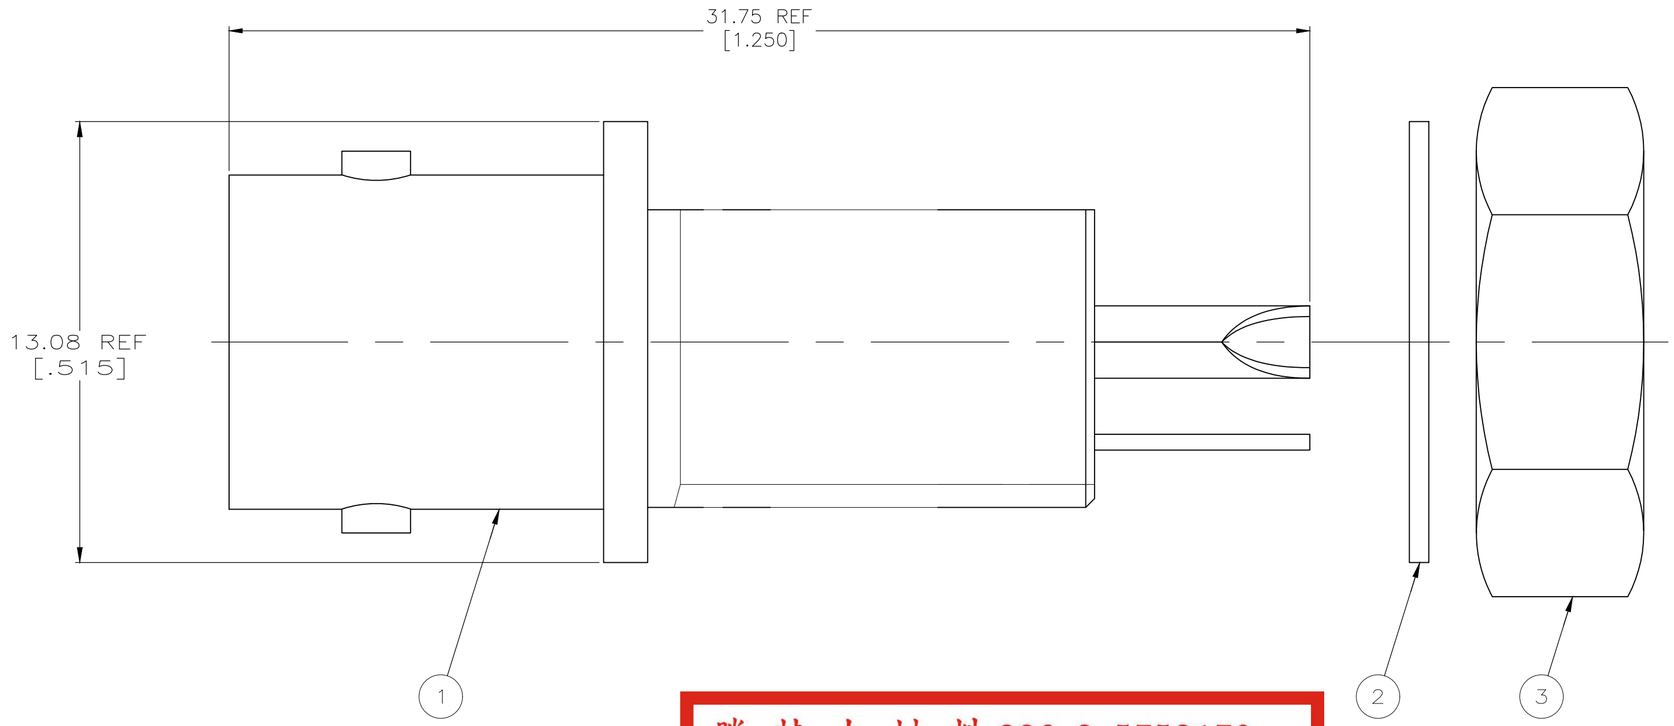

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

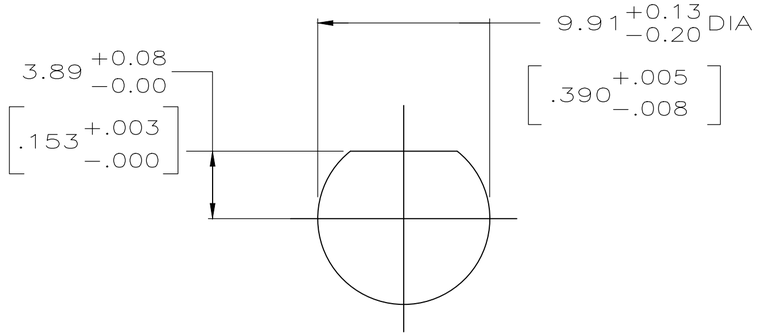

SUGGESTED PANEL CUTOUT
SCALE 8:1

9-414815-1	1-329492-1	227529-4 △4	5227726-5
9-414815-1	1-329492-1	227529-3 △3	5227726-3
9-414815-1	1-329492-1	227529-2	5227726-2
9-414815-1	1-329492-1	227529-1	5227726-1
③ JAM NUT QTY=1	② LOCKWASHER QTY=1	① JACK ASSY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN 21APR2005 L. VARELA – DOCK5
CHK 21APR2005 J. HAVENER
APVD 21APR2005 J. LIPPERT
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT 0.000000

TE Connectivity

NAME SOLDER JACK, ISOLATED, 50 OHM, BNC
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-5227726	–

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV B1

5227726