



25x25x10 mm

Bearing Type :Ball bearing

Air Flow:0.45-1.0 CFM

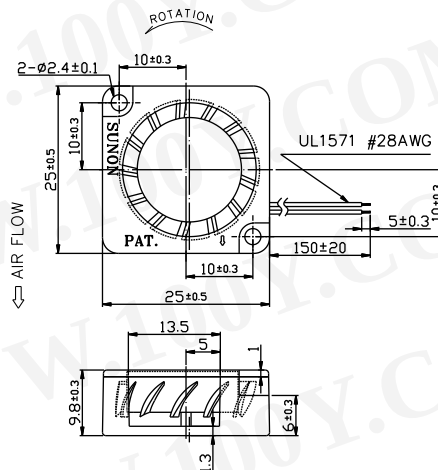



Traditional Blower

Model	P/N	Bearing ● VAPO ○ BALL ● 2BALL	Rating Voltage (VDC)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
B0502PFB1-8		○	5	0.18	0.9	12000	0.9	0.36	34	6
B0502PFB2-8		○	5	0.12	0.6	10000	0.7	0.23	32	6
B0502PFB3-8		○	5	0.06	0.3	7000	0.45	0.20	28	6
B0502AFB1-8		○	5	0.18	0.9	12000	0.9	0.36	34	9
B0502AFB2-8		○	5	0.12	0.6	10000	0.7	0.23	32	9
B0502AFB3-8		○	5	0.06	0.3	7000	0.45	0.20	28	9

MS Blower

B0502PFB1-8	MS	○	5	0.18	0.9	14000	1.0	0.40	37	6
B0502PFB2-8	MS	○	5	0.12	0.6	10000	0.8	0.25	30	6
B0502PFB3-8	MS	○	5	0.06	0.3	7000	0.45	0.20	19	6
B0502AFB1-8	MS	○	5	0.18	0.9	14000	1.0	0.40	37	9
B0502AFB2-8	MS	○	5	0.12	0.6	10000	0.8	0.25	30	9
B0502AFB3-8	MS	○	5	0.06	0.3	7000	0.45	0.20	19	9

Specifications subject to change without notice

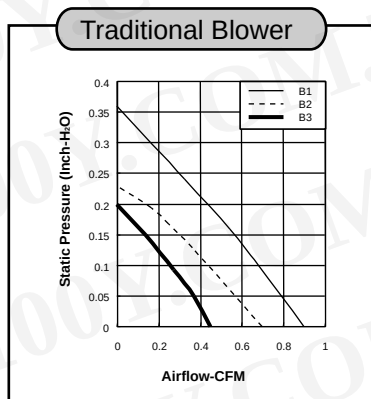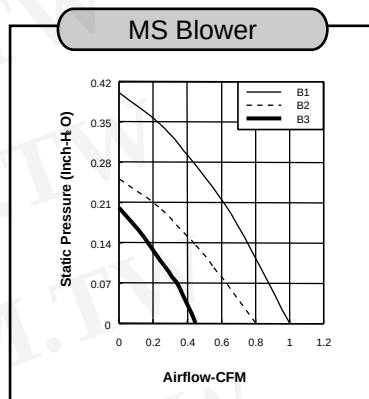

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)