

$$A = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.50$$




$$B = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

SPECIFICATIONS

Current Rating: 3 Amp. Max.
 Withstanding Voltage: 1000V AC R.M.S. /min
 Insulation Resistance: 5000M ohms min. At 1000V DC
 Contact Resistance: 30m ohms Max.
 Operating Temperature: -55° C to +105° C

MATERIAL&FINISH

Housing: P.B.T. (UL 94V-0)
 Color: Black
 Terminal: Copper Alloy
 Finish: Gold Plating(t=0.40MM)

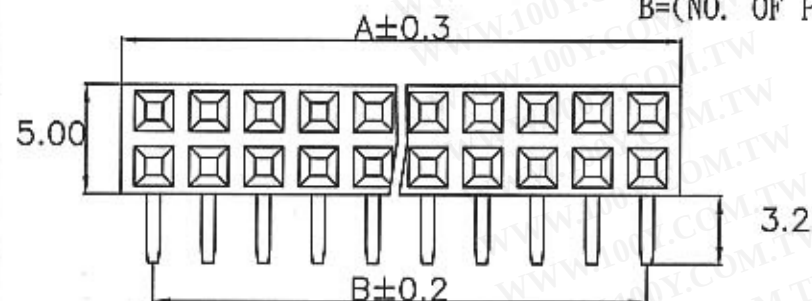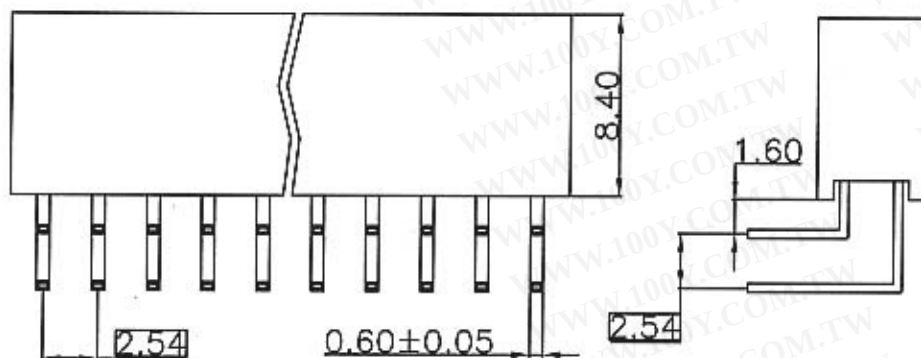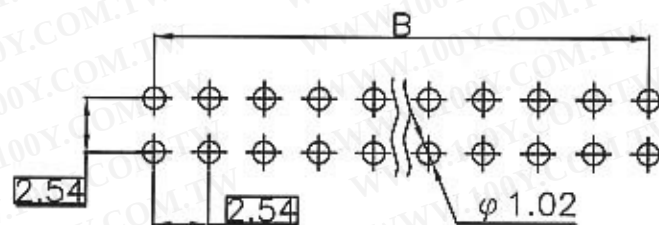

RECOMMEND P.C.B. LAYOUT
 BOTTOM VIEW

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

				UNIT		SCALE	PART NAME	
				MM		3:1	2.54mm FEMALE HEADER 90° DUAL ROW H=8.4mm	
DRAWING.		APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.	
制表日:2002/12/04		Jane			± 0.3		A	