

CA

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



DVI PLUG, SOLDER TAB

SPECIFICATIONS

Meets: DDWG's DVI specification

ENVIRONMENTAL

Temperature Range: -20°C to +85°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Shell Material: Steel

Contact Material: Brass

Contact Plating: Gold Flash

ELECTRICAL

Current Rating: 1.5 AMP

Insulation Resistance: 1000 Megohms Min.

Dielectric Withstanding: 500V AC (rms)

Contact Resistance: 20 Milliohms max

Consult factory for additional plating options


CA- DVI -A

POSITION	TYPE
17 = 12+4+1 (analog)	A = analog (17)
18 = 18+key (digital)	D = digital (18 or 24)
23 = 18+4+1 (integrated)	I = integrated (23 or 29)
24 = 24+key (digital)	
29 = 24+4+1 (integrated)	

DVI ACCESSORIES ORDERED SEPARATELY
 See page 22

NOTE: Contact height for Pin #14 is .185 [4.70].
 Balance of contacts are .215 [5.46].

CA-29DVIPI-A shown

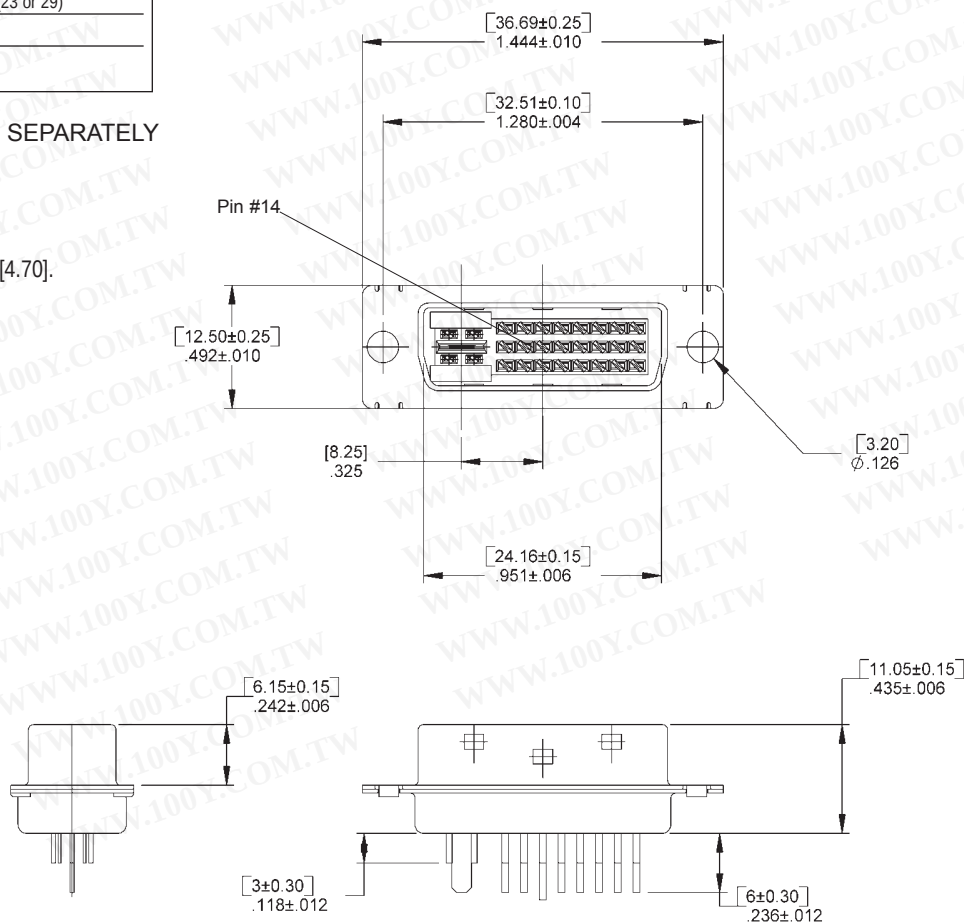

Mating Product: DVIS, DVI2S
 Drawing Numbers CA-620404 thru 620408