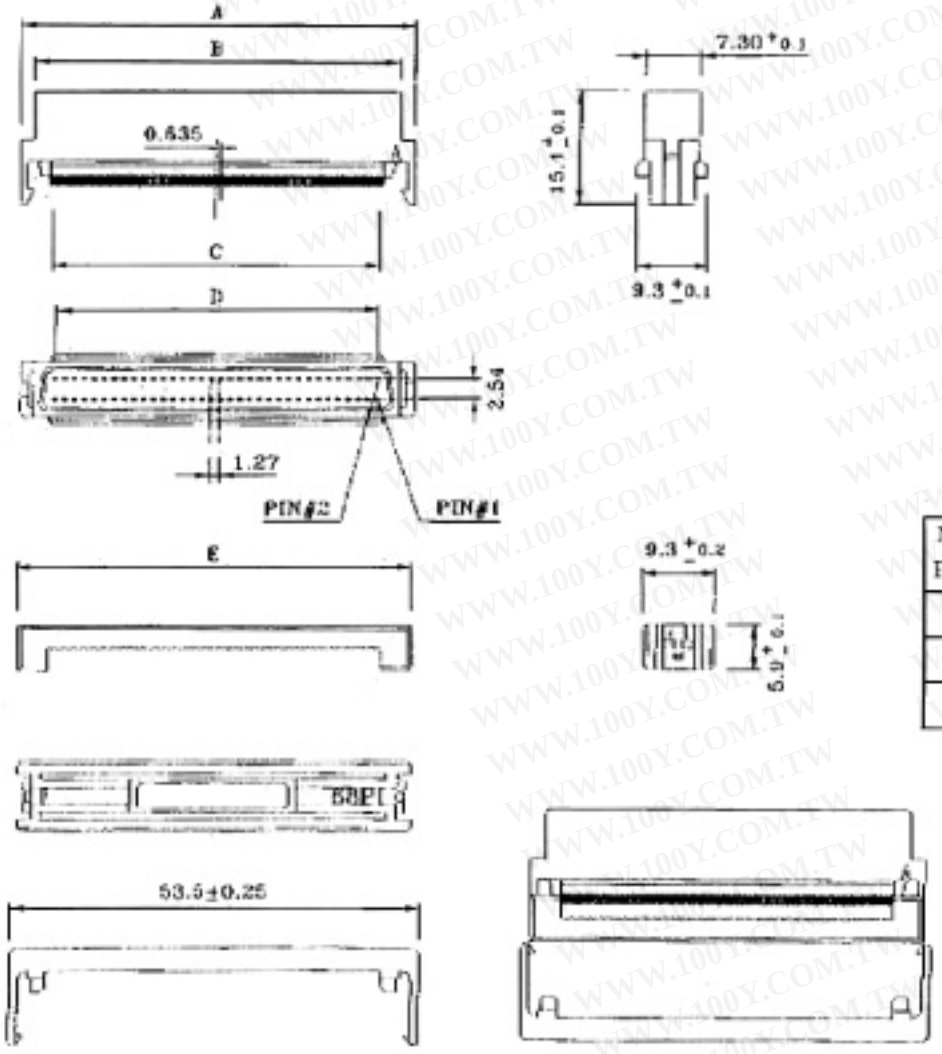


MATERIAL & FINISH
CONTACT MATERIAL:
COPPER ALLOY
INSULATOR MATERIAL:
PBT & GLASS-FIBER REINFORCED
UL 94-V0
CURRENT RATING:
1 AMP DC
CONTACT RESISTANCE:
30 MILLIOHM MAX AT 6V DC 0.3A
INSULATOR RESISTANCE:
1000M OHM MIN AT 500V DC
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
OPERATING TEMPERATURE:
-40°C~+105°C

Number Positions	A ±0.25	B ±0.25	C φ0.635x(n-1)	D φ1.27x(n/2-1)	E ±0.25
50	40.02	36.32	31.115	30.48	40.02
68	51.45	47.75	42.545	41.91	51.45
80	59.07	55.37	50.165	49.53	59.07

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

	UNIT	SCALE	PART NAME
	MM	2:1	SCSI-Ⅲ D-SUB IDC(MALE) PITCH:1.27mm ALL PLASTIC

制表日:2002/12/04	DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.
					± 0.5		A