
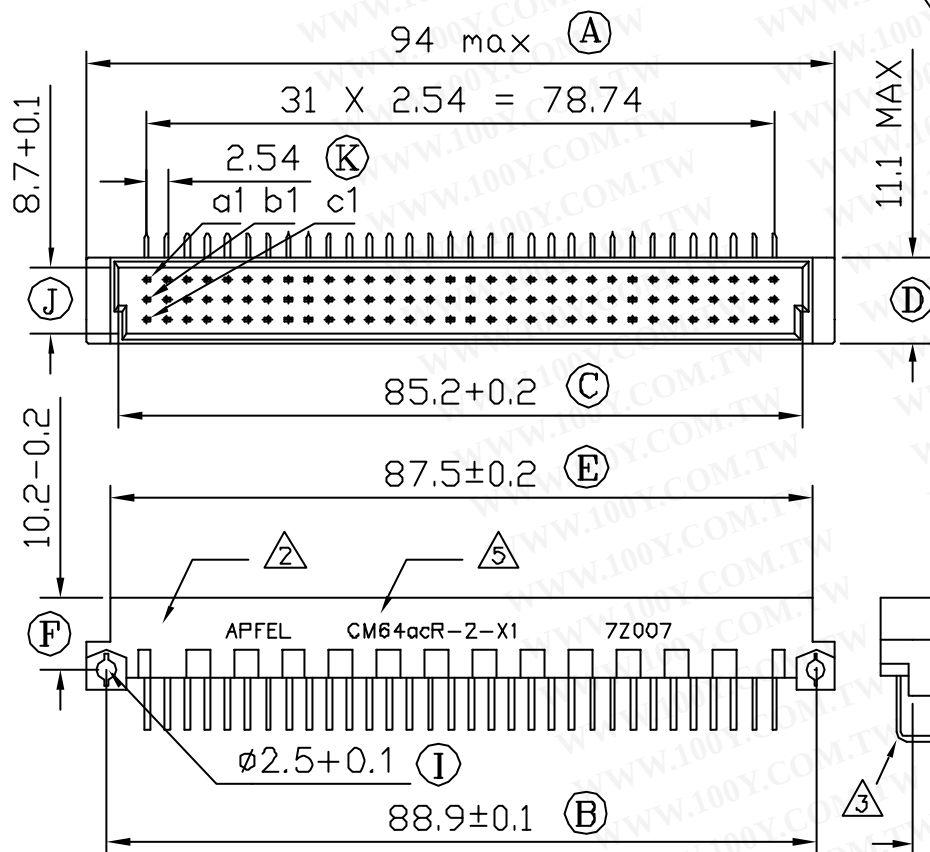



	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
a	⊗	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	⊗
b																																
c	⊗	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	⊗

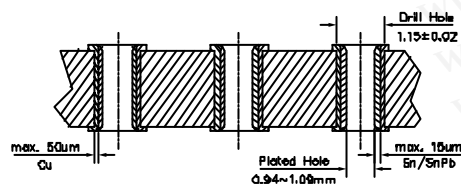

RECOMMENDED HOLE SPECIFICATIONS
SECTION A-A
SCALE 6 : 1

NOTES:

- 1 CONNECTOR MEETS REQUIREMENT OF DIN 41612
- 2 MATERIAL
-HOUSING :GLASS-FILLED PBT, COLOR GREY, UL 94V-0
-CONTACTS :BRASS
- 3 CONTACT TAIL DIMENSION
-THICKNESS :0.48 ±0.03mm
-WIDTH :0.48 ±0.03mm
-TAIL LENGTH :3 - 0.4mm
- 4 CONTACT FINISH
-1: 30u"(0.75um) GOLD PLATING ON MATING AREA, TIN PLATING ON TAIL AREA, FLASH GOLD PLATING ON NON-MATING AREA, NICKEL UNDERPLATE ALLOVER
-2: 15u"(0.38um) GOLD PLATING ON MATING AREA, TIN PLATING ON TAIL AREA, FLASH GOLD PLATING ON NON-MATING AREA, NICKEL UNDERPLATE ALLOVER
BLANK: FLASH GOLD PLATING ON MATING AREA AND NON-MATING AREA, TIN PLATING ON TAIL AREA, NICKEL UNDERPLATE ALLOVER
- 5 CONNECTOR PRINTED WITH COMPANY NAME, PART NUMBER, AND BATCH NUMBER
- 6 MATING SIDE LENGTH
STANDARD : 5.05-0.25mm
EXTENDED : 5.60+0.2/-0.05mm
SHORT : 4.25+0.1/-0.05mm
- 7 CONTACT ARRANGEMENT
X : DENOTES A STANDARD CONTACT LENGTH
⊗ : DENOTES AN EXTENDED CONTACT LENGTH
BLANK : DENOTES NO CONTACT AT THAT POSITION

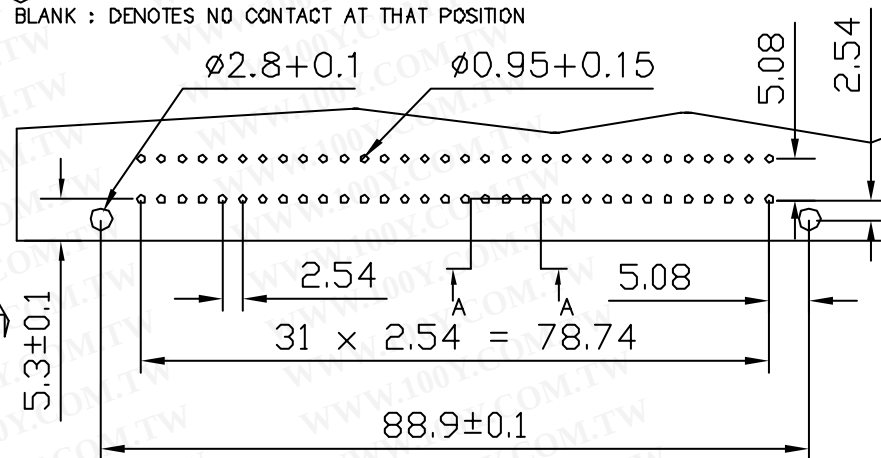

RECOMMENDED PCB HOLE LAYOUT
COMPONENT SIDE
SCALE 1 : 1

DESCRIPTION : MALE, TYPE C, 64 CONTACTS,
RIGHT ANGLED SOLDER CONNECTORS
CUSTOMER DRAWING

PART NUMBER

NO.1 CM64acR-1-X1
NO.2 CM64acR-2-X1
NO.3 CM64acR-X1

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

			MILLIMETRE
X XXX	±0.012		
X XX	±0.05		
X X	±0.1		
X	±0.25		
DRAWN	UNITS	ANGLE	
ST Ling	mm	1°	
CHECKED	SCALE	REV	DRAWING NO.
H Shen	1:1	A	FO361.DWG