

CW1D



● SPECIFICATION

1.Max.Leakage current (each).

Line to Ground : 115 V AC 60Hz 0.25mA

Line to Ground : 250 V AC 50Hz 0.45mA

2.Hipot rating (one minute)

Line to Ground : 2250 V DC

Line to Line : 1450 V DC

3.Power line frequency : 50/60Hz

4.Rated Voltage : 115/250 V AC

5.Operating temp : -25~85° C


● COMPONENTS

PART / NO.	CX (uF)	CY (pF)	R (MΩ)	Lg (μH)	SCHEMATIC
CW1D-□□A-T(00)	0.1	3300	1.0	100	1
CW1D-□□A-T(01)					2
CW1D-□□A-T(02)					3
CW1D-□□A-T(03)		2200	1.0	100	2
CW1D-□□A-T(04)					3
CW1D-□□A-T(05)	0.047	2200	1.0	100	1
CW1D-□□A-T(06)					2


L(mH) : 01A:3.7 03A:1.8 06A:0.7 10A:0.3

Terminal : T:250 ST:187 RT:157


● DIMENSIONS (mm)

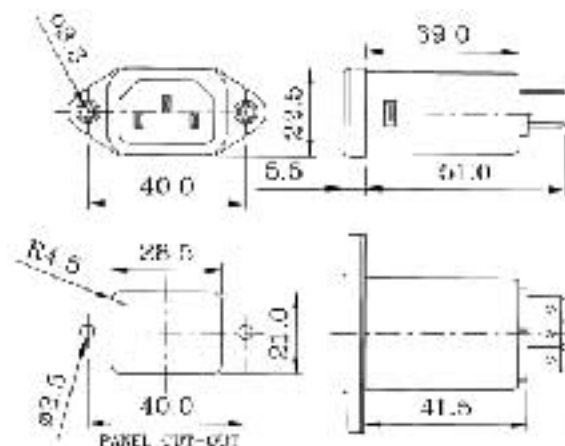


● SCHEMATIC

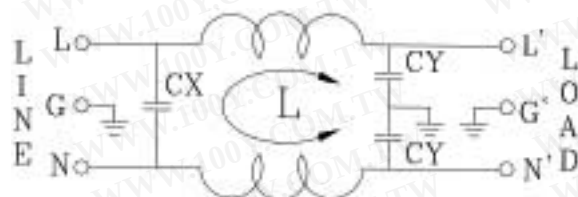

ELECTRICAL SCHEMATIC 1

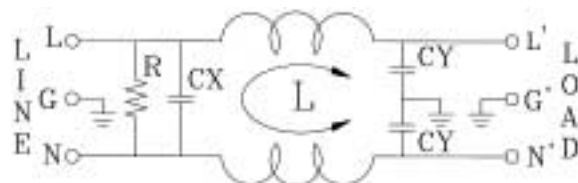

ELECTRICAL SCHEMATIC 2

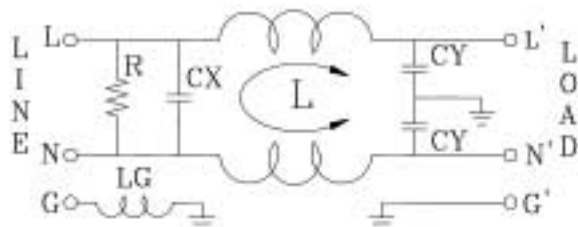

ELECTRICAL SCHEMATIC 3