

CW3

CW3L2



● SPECIFICATION

1.Max.Leakage current (each).

Line to Ground : 115 V AC 60Hz 0.25mA

Line to Ground : 250 V AC 50Hz 0.45mA

2.Hipot rating (one minute)

Line to Ground : 2250 V DC

Line to Line : 1450 V DC

3.Power line frequency : 50/60Hz

4.Rated Voltage : 115/250 V AC

5.Operating temp : -25~85°C

● COMPONENTS


PART / NO.	CX (uF)	CY (pF)	R (MΩ)	SCHEMATIC
CW3-□□ A-T(00)	0.1	3300	1.0	4
CW3-□□ A-T(01)				2
CW3-□□ A-T(02)	0.22	2200	1.0	2
CW3-□□ A-T(03)				4

L(mH) : 01A:3.7 03A:1.8 06A:0.7 10A:1.2
15A:0.9 20A:0.5

PART / NO.	CX (uF)	CY1 (pF)	CY2 (pF)	R (MΩ)	SCHEMATIC
CW3L2-□□ A-T(00)	0.1	1500	1000	1.0	9
CW3L2-□□ A-T(01)		3300			10

L(mH) : 01A:3.7 03A:1.8 06A:0.7 10A:0.3
Terminal : T:250 L:Wire S:Screw

● DIMENSIONS (mm)

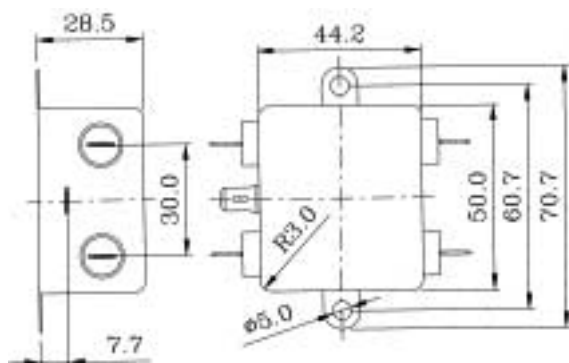

● SCHEMATIC

