


D-SUB IDC Female Connector

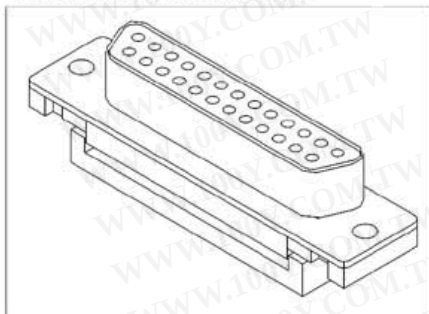

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CIRCUITS	A	B	C	D	E
9	16.33	24.99	30.90	21.80	12.08
15	24.66	33.32	39.20	29.60	19.70
25	38.38	47.07	53.10	43.30	32.40
37	55.42	63.50	69.50	59.90	47.72

MATERIAL:

Housing : 30% Glass filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating:1 AMP

Insulator Resistance: 5000M Ω min.
at DC 500V.

Contact Resistance : 20m Ω max. at DC 100mA.
Operating Temperature : -55 $^{\circ}$ C~+105 $^{\circ}$ C.

ORDERING INFORMATION:

Blank:Standard hole only


N:With Clinch 4-40Nut

Blank:All Plastic


M:With Metal shell

S:Female




No. of Positions

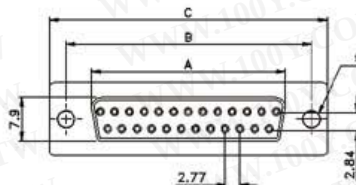

(WITH METAL SHELL)

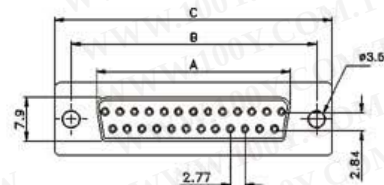

(ALL PLASTIC)

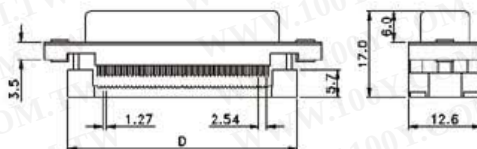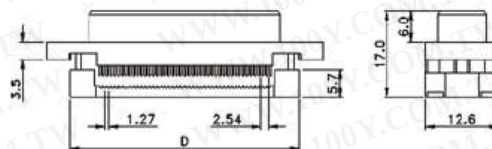

UNIT : mm