


D-SUB Standard Right Angle Male

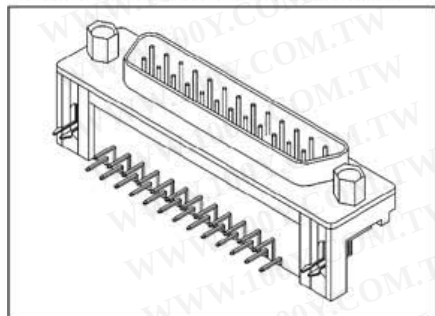

MATERIAL:

Housing : 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 AMP


Insulator Resistance: 5000M Ω min.

at DC 500V.



Contact Resistance : 20m Ω max. at DC 100mA.

Operating Temperature : -55 $^{\circ}$ C~+105 $^{\circ}$ C.

POSITIONS	A $\square$ 0.5	B	C
9	30.81	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.42

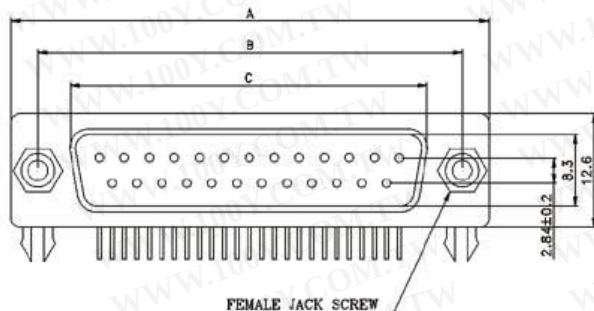

	X
F1	8.08
F2	9.40
F4	14.99

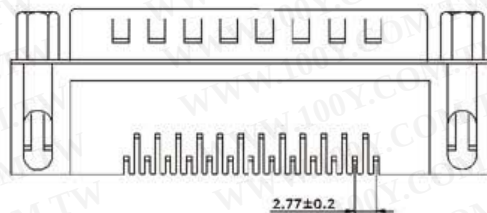

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)