勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

SHINNING

排针 母座 1262、1263系列

Sockets Headers(Female) 1262、1263 Series

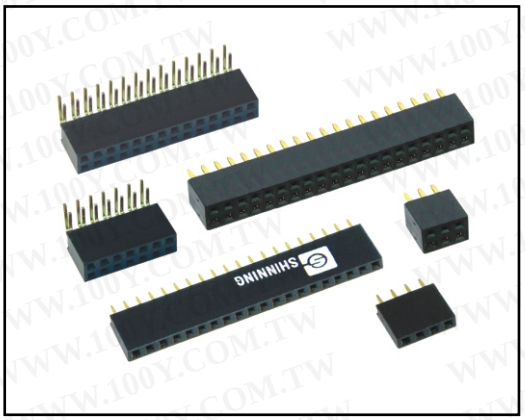

Features

- A good quality Socket Header designed for connectable parallel or angled PCB to PCB applications.
- Protected fork contacts(stamped).
- Maximum number of contacts are 40 contacts for single row and 80 contacts for double row.
- Any number of contacts can be delivered upon your request.

Electrical

- Current rating: 1 A
- Contact resistance: ≤ 20 mΩ
- Insulation resistance: ≥ 5000 MΩ
- Dielectric strength: ≥ 500 V.r.m.s.

Mechanical

- Insertion force : ≤ 3N/Pin (with steel pin 0.64X0.64)
- Extraction force: ≥ 1.6N/Pin (with steel pin 0.64X0.64)
- Operating temperatures: -55℃ ～ +125℃

特 点

- 此类高品质之排针 插 座 是专为PC板 平行或 垂直连接而 设 计的
- 叉 形模压成型触片
- 单排触点 最 多为40个 ， 双排触点 最 多为80个
- 触点 数 目可以按用户要求 而 定

电 气 特性

- 额 定电 流 ：1 A
- 接触电 阻 ：≤ 20 mΩ
- 绝 缘电 阻 ：≥ 5000 MΩ
- 耐电 压 ： ≥ 500 V.r.m.s.

机 械特性

- 插 入 力：≤ 3.0N/Pin(用0.64X0.64的钢针)
- 拔出 力：≥ 1.6N/Pin(用0.64X0.64的钢针)
- 适用环境：-55℃ ～ +125℃

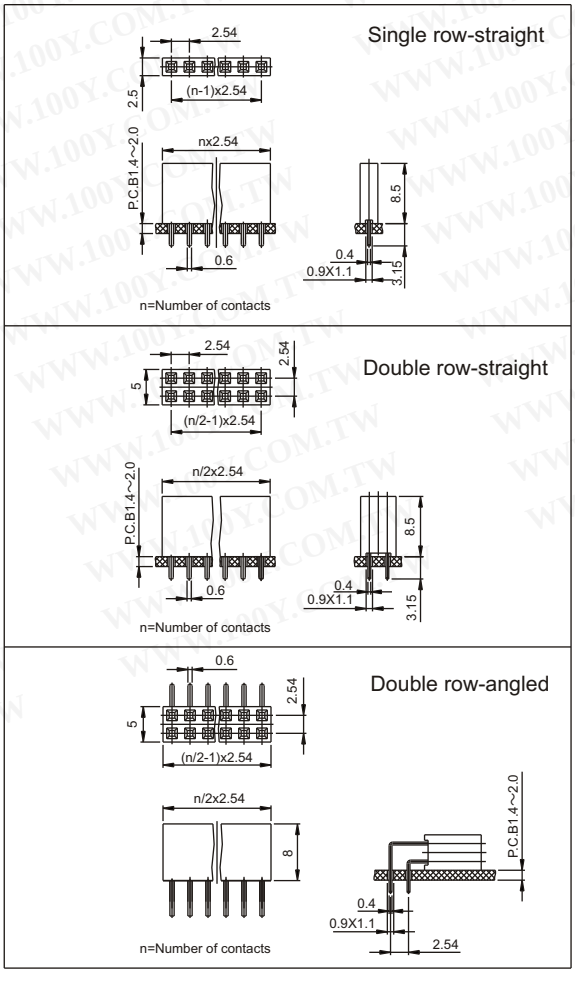

1 2 6 X - X X 0 - X X - X

- 塑胶材料及颜色(Insulator material and color)
  1：黑色(Black) PBT+30%GF UL94V-0
- 镀层（ PLATING）

代 码 (code)	引 脚镀层 (contact plating)
1	3μm Sn Pb
2	Gold flash
3	0.25μm Au

- 排数 (Number of rows)

代 码 (code)	定义 (Definition)
1	单排 Single row
2	双排 double row

- 触点 数 量 (Number of contacts)

代 码 (code)	定义 (Definition)
1-40	单排 Single row
4-80	双排 Double row

- 引 脚类型 (Pin style)

代 码 (code)	定义 (Definition)
2	直 脚 straight
3	弯 脚 angled