

2.0MM FEMALE HEADER LOW PROFILE 4.85MM RIGHT ANGLE TYPE

MATERIAL

Insulator : NYLON 6T ,UL94V-0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP


Insulation Resistance : 5000MΩ Min.

Contact Resistance : 20mΩ Max.

Dielectric voltage : 500V AC for one minute


Operation Temperature : -40°C to +105°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

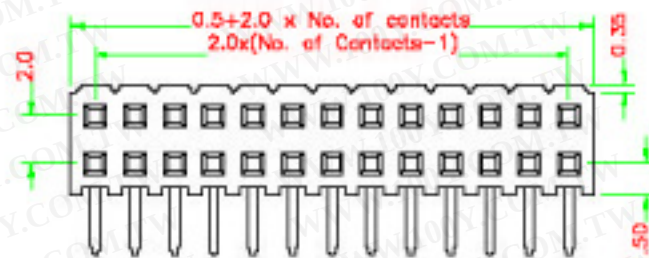

ORDER INFORMATION

1. Z: Dual rows
2. No. of contacts per row
3. G: Gold flash
4. B: Black Insulator



Recommended P.C.B. Layout

UNIT : mm

圖名 MOLD NAME		2.0MM FEMALE HEADER R/A TYPE			
圖號 DRAWING NO.				比例 SCALE	FREE
公差 TOLERANCE		±0.2	繪圖 DRAW BY	日期 DATE	011126