


INSULATION DISPLACEMENT CABLE

.050" PITCH, 28 AWG, STRANDED EXTRUDED FEP **MECHANICAL CHARACTERISTICS**

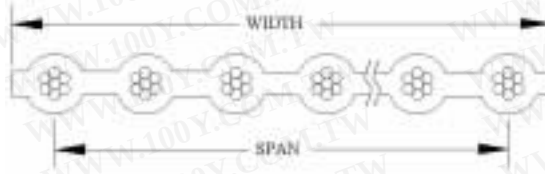

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Number of Conductors	Span	Width
10	0.450 ± .007	0.500 ± .007
14	0.650 ± .007	0.700 ± .007
15	0.700 ± .007	0.750 ± .007
16	0.750 ± .007	0.800 ± .007
20	0.950 ± .010	1.000 ± .010
24	1.150 ± .010	1.200 ± .010
25	1.200 ± .010	1.250 ± .010
26	1.250 ± .010	1.300 ± .010
30	1.450 ± .010	1.500 ± .010
34	1.650 ± .010	1.700 ± .010
37	1.800 ± .010	1.850 ± .010
40	1.950 ± .010	2.000 ± .010
50	2.450 ± .010	2.500 ± .010
60	2.950 ± .015	3.000 ± .015
64	3.150 ± .015	3.200 ± .015

PHYSICAL CHARACTERISTICS

Conductor Type	28 AWG, 7/36 Stranded, Silver Plated Copper Optional: Solid Conductor Bare Copper
Insulation	FEP Extruded (-55° C to 200° C)
Number of Conductors	2 to 64
Color	Solid red or blue with blue polarity stripe (standard) Optional: Rainbow

PACKAGING

100 ft./Reel, 50 Ft. minimum average length, 10 Ft. minimum length
UL STYLE 20424