




F
E
D
C
B
A

1 2 3 4 5 6 7 8

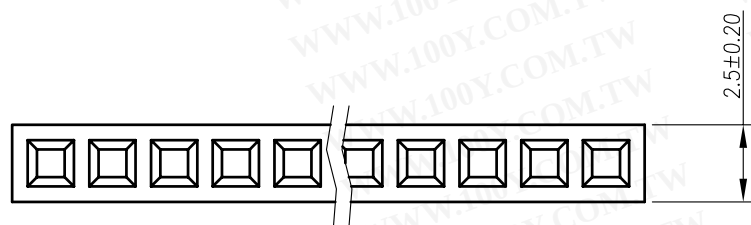

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REV	MODIFICATION	DATE	DRAW
B	EN-02-0620	91.6.21	SEVEN
C	EN-02-0708	91.7.10	SEVEN

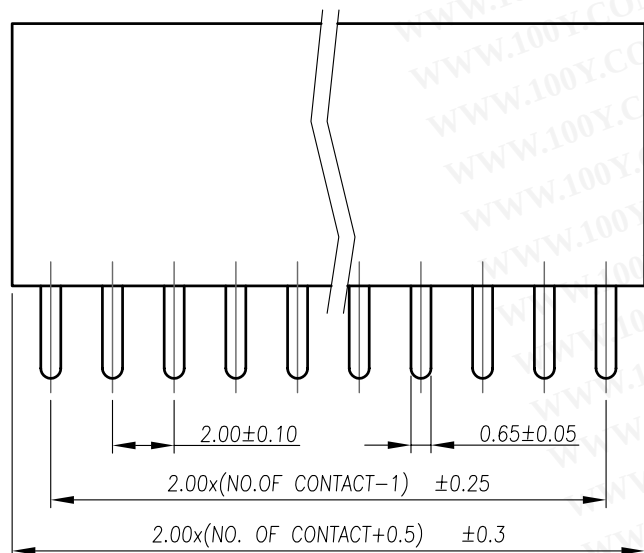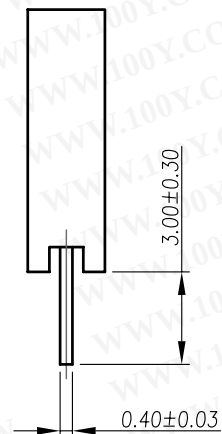

NOTE:

SPECIFICATION

- 1.Current Rating: 3A
- 2.Withstanding Voltage: 500 VAC (1 Minute)
- 3.Insulation Resistance: 1000 Megohms Min.
- 4.Contact Resistance: 30 Milliohms Max.
- 5.Operating Temperature: -40°C to +85°
- 6.Retention Force: 450g Min.


MATERIAL

- 1.Contact: Brass
- 2.Insulator: PBT & 30% G.F.
- 3.Plated: Gold Flash

ORDER INFORMATION

FPHSI-1 XX 01B010

NO. OF CONTACT

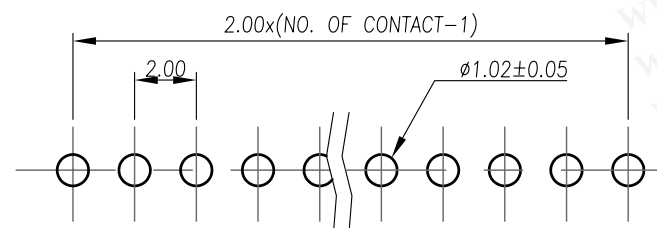

P.C.B. LAYOUT

DIMENSION IN mm [Inch]		PROD. SPEC.	C	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE FEMALE HEADER 2.00mm DIP HSG.=8.5mm	
.X±0.30	X.*± 1°	APPROVE	CUSTOMER DRAWING	
.XX±0.20	.X.*± 0.5°	CHECK	FILE NO.	DWG NO. FPHSI-1XX01B010
.XXX±0.10	.XX.*± 0.25°	DRAW	SIZE A4	PROJ. SHEET 1 / 1
			SCALE 4:1	REV C

F
E
D
C
B
A