

Technical Information

No. FO 4910

Edition: 07/02 - subject to change

supersedes: 03/99

Status: valid


Tungsten Halogen Lamp with Reflector

HLX 64634

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Product description

- Tungsten halogen lamp for projection and light guide applications.

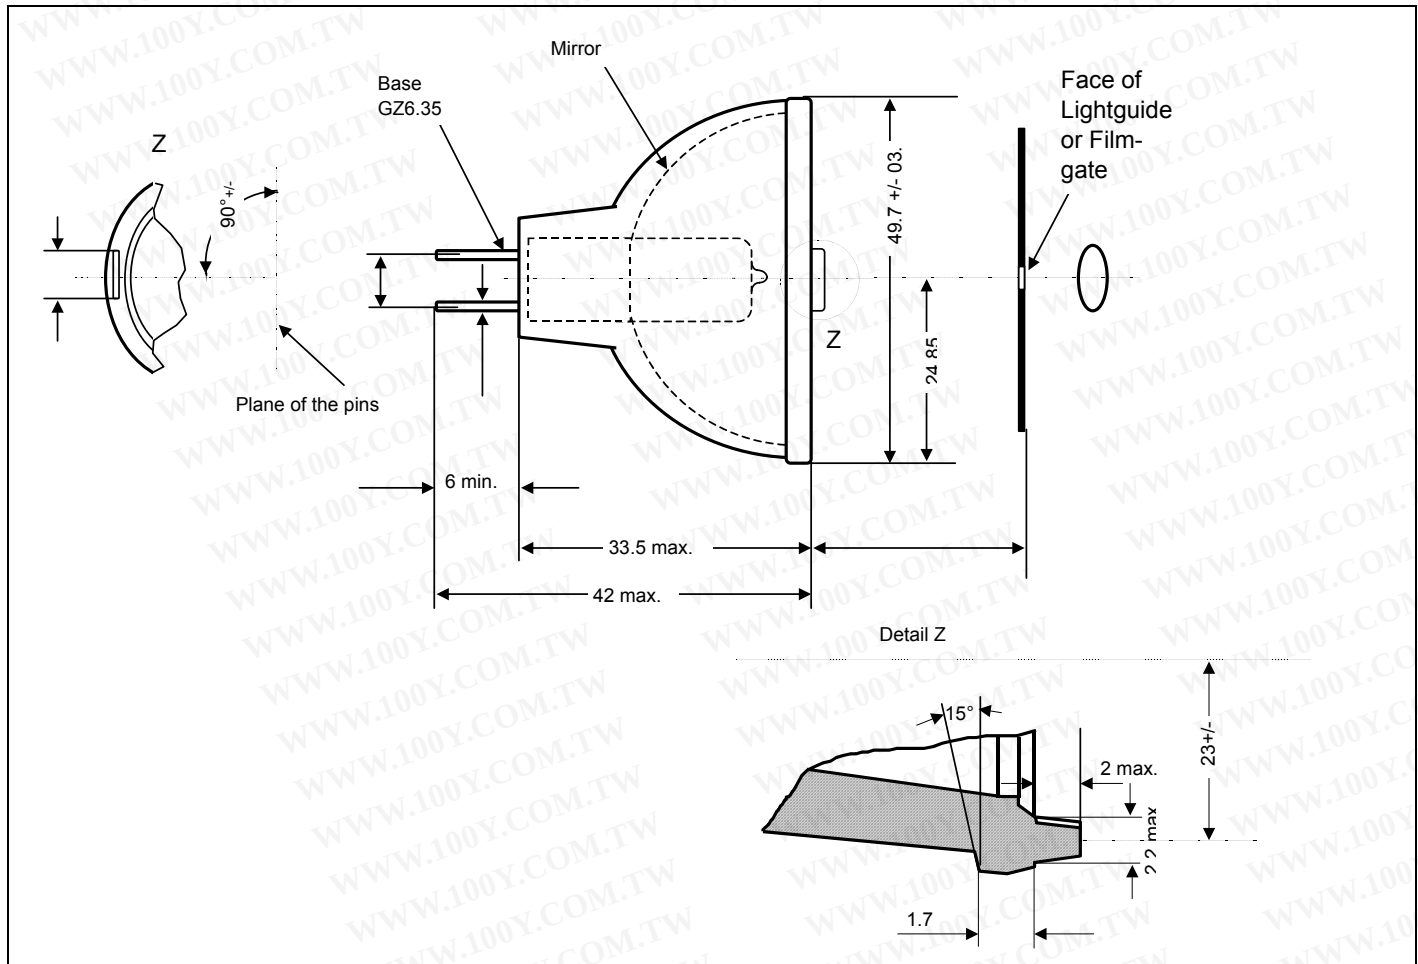

■ Technical data

Order reference	HLX 64634	
ANSI	EFR	
LIF	A1/232	
Voltage	V	15
Rated wattage	W	150
Screen lumen	lm	400 (350 min.)
Corner/center ratio	%	75 (65 min)
Measuring conditions for screen lumen	Projection lens ELKINON 1:1.2; f = 20mm, aperture 5.36 x 4.01 mm	

Technical Information

No. FO 4910

Edition: 07/02 - subject to change

supersedes: 03/99

Status: valid

Tungsten Halogen Lamp with Reflector

HLX 64634

Type of reflector	Glass reflector (MR16), dichroic coating	
Reflector diameter d	mm	max. 51
Overall length l_1	mm	max. 42
Lamp length l_2	mm	max. 33.5
Working distance a	mm	32
Average service life	h	50
Base	GZ 6.35	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Required conditions of operation

Burning position	p90/ 15 (horizontal, up to 90° up, up to 15° downwards)	
Maximum permissible seal temperature	°C	400
Maximum permissible reflector temperature	°C	350
Maximum permissible bulb temperature	°C	950
Cooling	forced cooling necessary	