


HS29

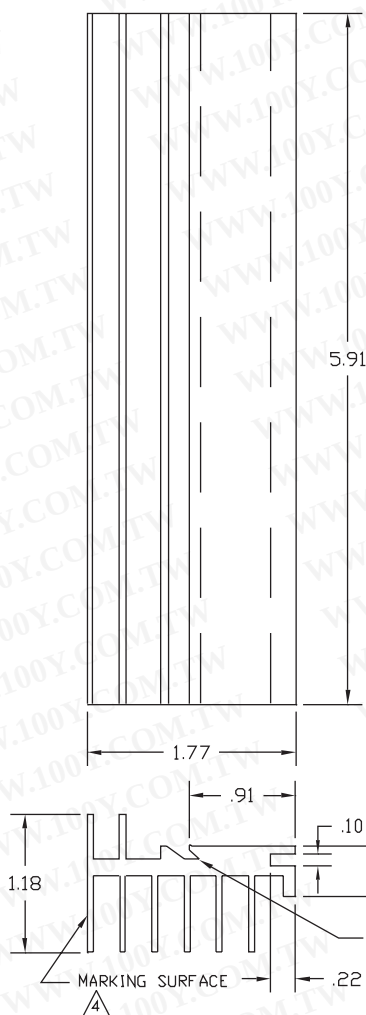

NOTES:

1. MADE FROM THERMALLOY EXTRUSION KM150-1
2. FINISH TO BE BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2. FOR REFERENCE, TYPICAL BREAKDOWN VOLTAGE >300V.
3. BREAK ALL SHARP EDGES, DE-BURR AND REMOVE ALL LOOSE CHIPS.
4. MARKING: HS29
MARK WITH CONTRASTING WHITE INK OR CAN BE STAMPED.
DO NOT MARK PART WITH REV. LEVEL
5. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

TOLERANCES - UNLESS OTHERWISE SPECIFIED	.XX = ± 0.15
	.XXX = ± 0.005
	ANG. = $\pm 5^\circ$