带外层圆扁平形(MO)电缆(P=1.27mm)对绞线型
Round cabled, twisted flat

扁平形电缆
Flat cable

20266-TW
20266-TW-SB

●额定 Rating　80°C, 150V
●标准 Standard　UL Subject 758
●日立标准规格书 Hitachi Specification：　SP23-90904 (20266-TW, 20266-TW-SB)
SP23-90878 (MO-TW, MO-TW-SB)

■特长
1. 可使用扁形电缆用整体压接端子。
2. 因是圆形电缆，使用方便。

♦ Features
1. Available for use with I.D.C. connectors.
2. Round cabled for ease of routing.

■用途
控制装置的内部配线及各种机器间配线

♦ Application
Internal wiring or external interconnection of electronic equipment. Or, internal or external wiring for electric machinery or equipment where not subject to mechanical abuse.

■构造和性能

♦ Construction, Properties

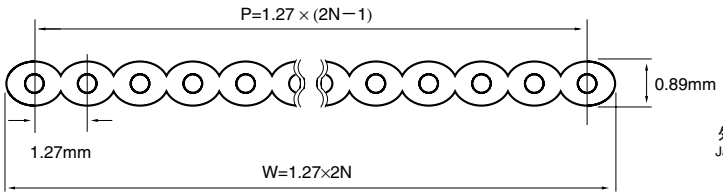

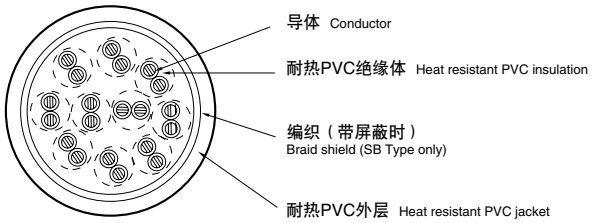

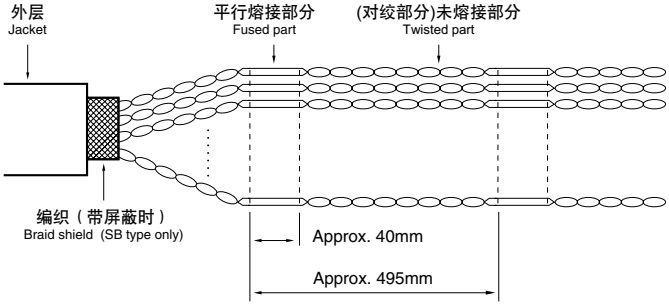

导体 Conductor		未熔接部绝缘体外经 Insulation dia. at unfused part	线间间距 Cond. spacing	最大导体电阻 Max. cond. resistance at 20°C	最小绝缘电阻 Min. insulation resistance at 20°C	耐电压 Dielectric withstanding voltage
AWG 型号 Size	构成 Stranding (No./mm)	(mm)	(mm)	(Ω/km)	(MW/km)	
28	7/0.127	1.04	1.27	229	100	A.C. 1500V/1min

线对数 No. of conductors			5	8	10	12	13	15	17	20	25	30	32
屏蔽 SB Type	成品外径	O. D. (mm)	8.0	9.2	10.7	11.0	11.2	11.8	12.5	13.1	14.8	15.7	16.0
	概算质量	Approx. mass (kg/km)	65	85	100	110	115	125	140	155	185	210	220
非屏蔽	成品外径	O. D. (mm)	7.4	8.6	10.1	10.4	10.6	11.2	11.9	12.5	14.2	15.1	15.4
	概算质量	Approx. mass (kg/km)	45	60	70	75	80	90	105	125	145	170	180

备注
1. 绝缘体的颜色
普通绞线导体:　(红、白)、(蓝、白)、(蓝、白)
(蓝、白)、(蓝、白)每 5 对进行反复
绞线整体镀锡:　(黑、黄)、(绿、黄)、(绿、黄)
(绿、黄)、(绿、黄)每 5 对进行反复
2. 产品形状: 100m/线盘

Note
1. Insulation color
Stranded cond. : (Red, White), (Blue, White), (Blue, White), (Blue, White), (Blue, White) repeated
Hi-wrap wire : (Black, Yellow), (Green, Yellow), (Green, Yellow), (Green, Yellow), (Green, Yellow) repeated
2. Packing : 100m / coil

■品名略号（例）Ordering description (ex.)
UL20266-TW-SB ✻P × 28AWG (✻✻) LF
普通绞线导体 Stranded cond. : 7/0.127, 绞线整体镀锡导体 Hi-wrap wire : TASC
表示线对数 No. of pairs
屏蔽时的附加记号 SB type only

■品名代码: **Product I.D** : 186