




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

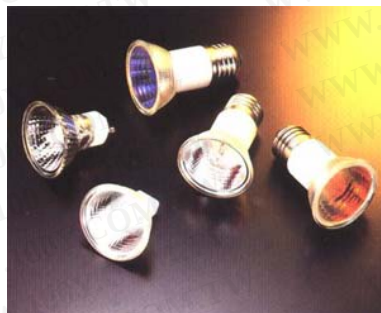

JDR / JCDR						
Item	Volts (V)	Watts (W)	Axis cd(cd)	Beam Angle	Color Temperature(k)	Life Hours
JDR BASE :E14,E17,E26,E27,B22						
JDR20	110~130 or 220~240	20	600	40°	2750	1500
JDR35		35	600	40°	2800	1500
JDR50		50	1000	40°	2925	1500
JDR75		75	1200	40°	3050	1500
JCDR BASE :GX5.3,G8.0						
JCDR20	110~130 or 220~240	20	600	40°	2750	1500
JCDR35		35	600	40°	2800	1500
JCDR50		50	1000	40°	2800	1500
JCDR75		75	1200	40°	2800	1500
JCDR BASE :GU10						
JCDR20	110~130 or 220~240	20	600	30°	2750	1500
JCDR35		35	600	30°	2800	1500
JCDR50		50	1000	30°	2800	1500
JDR BASE :E14,E17,E26,E27,B22						
JDR20	110~130 or 220~240	20	600	40°	2750	1500
JDR35		35	600	40°	2800	1500
JDR50		50	1000	40°	2925	1500
JDR75		75	1200	40°	3050	1500
JCDR BASE :GX5.3,G8.0						
JCDR20	110~130 or 220~240	20	600	40°	2750	1500
JCDR35		35	600	40°	2800	1500
JCDR50		50	1000	40°	2800	1500
JCDR75		75	1200	40°	2800	1500
JCDR BASE :GU10						
JCDR20	110~130 or 220~240	20	600	30°	2750	1500
JCDR35		35	600	30°	2800	1500
JCDR50		50	1000	30°	2800	1500