

MR-21 (RL3-4) SERIES

Specifications:

- Rating: □: 10A 125VAC/6A 250VAC μ T85
 T: 16A 125VAC/10A 250VAC
 1/3HP 125~250VAC T105
- Contact Resistance: 20m Ω (max.)
- Insulation Resistance: DC 500V 100M Ω (min.)
- Dielectric Strength: 1500VAC/1 Minute
- Safety Approval:



MR-21 (RL3-4)


Circuit

A	4P ON-OFF
B	3P ON-OFF(III)
C	4P ON-OFF(III)

Rating

□	Standard
T	16A


Stamp




Color Rocker/Housing

Black	White	Red	Green	Ivory	Gray	Yellow
B	W	R	G	I	H	Y
黑色	純白色	紅色	綠色	象牙白	灰色	橘黃色


Schematic




Terminal

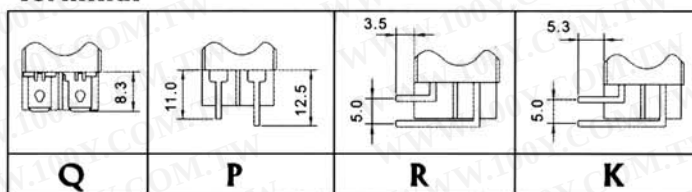

MR-21 A-Q-B/B-3



N.W:5g

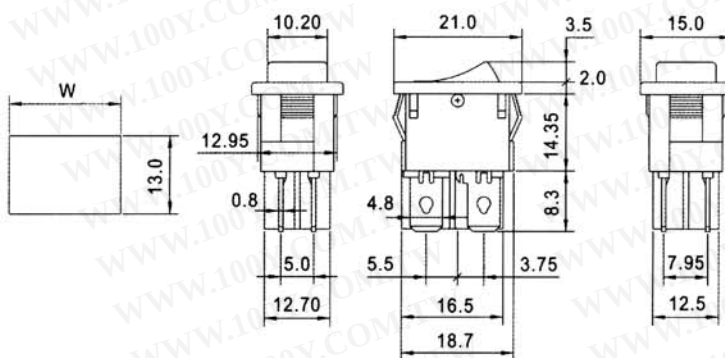


W	Panel Thickness
19.2	0.75-1.25
19.4	1.25-2.0
19.8	2.0-3.0

MR-21 C-Q-R/B-1


MR-21 C-Q-G/W-1

MR-21 A-Q-H/H-3


MR-21 A-R-B/B-3




N.W:5g



N.W:5g



N.W:5g



N.W:5g