




PLK-16-P

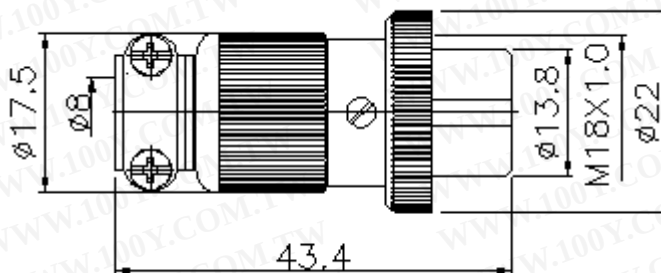

PLK-16-R

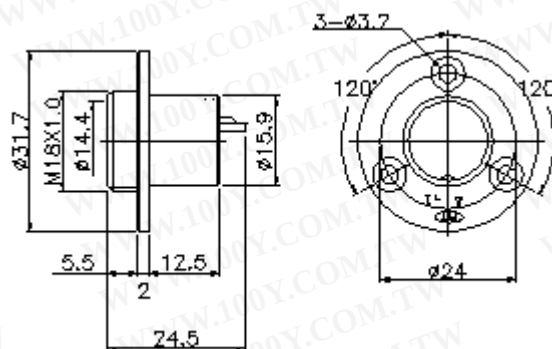

PLK-16-RCa

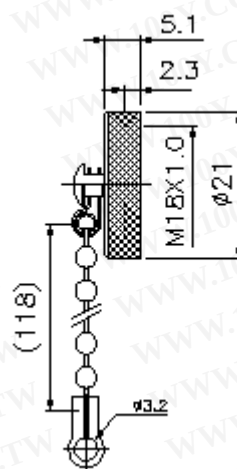

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

No. of contacts

Contacts
Cofiguration

Rated current/voltage

Operation limit voltage (AC.V.rms)

Withstanding voltage (AC.V.rms) 1 minute

Insulation resistance (MΩ MIN.) at DC 500V

Contact resistance (MΩ MAX.) AT DC 1A

Pin diameter (Ømm)

