



□ PLS-24 結構圖

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


PLS-24-PF

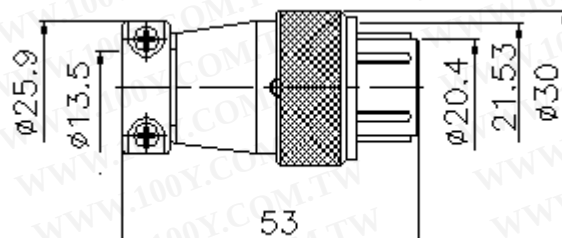


PLS-24-PM

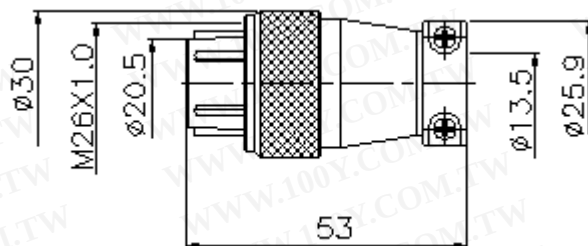


PLS-24-RF

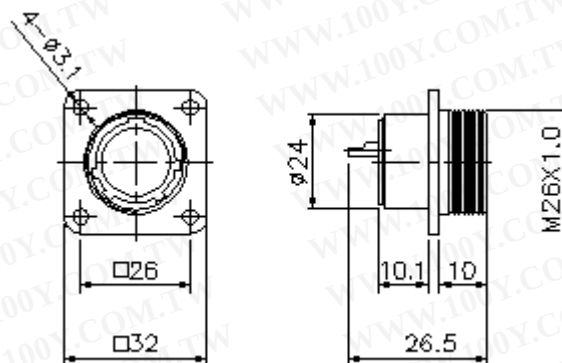

PLS-24-RCA

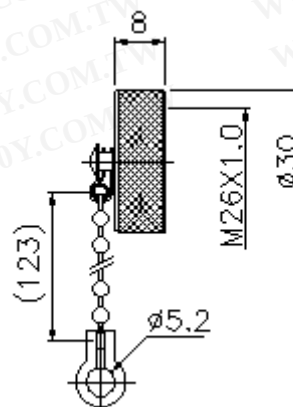

PLS-24-RM

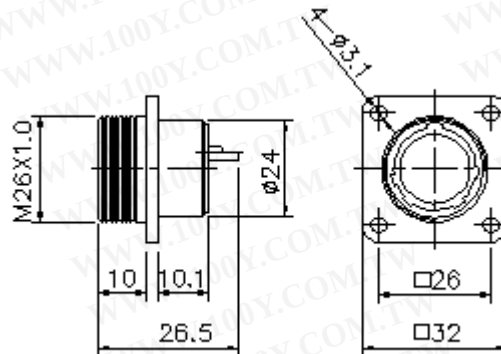

No. of contacts

10

Contacts
Configuration



Rated current/voltage

10A 250V

Operation limit voltage (AC.V.rms)

250

Withstanding voltage (AC.V.rms) 1 minute

1000

Insulation resistance (M Ω MIN.) at DC 500V

2000

Contact resistance (M Ω MAX.) AT DC 1A

3

Pin diameter (ϕ mm)

1.6

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)