



□ PLS-35 結構圖

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


PLS-35-PF

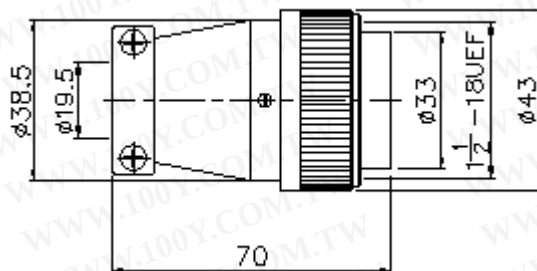


PLS-35-PM

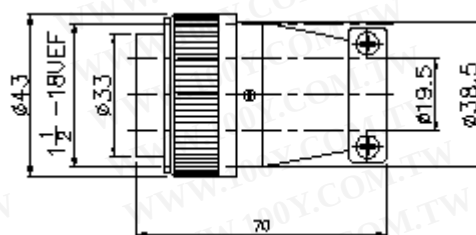

PLS-35-RF

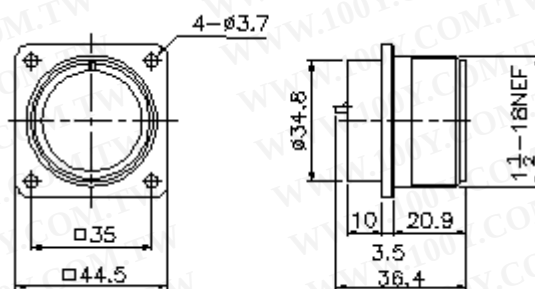

PLS-35-RM

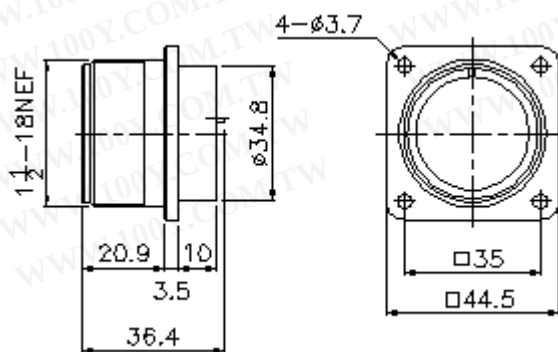

No. of contacts

24

Contacts

Cofiguration



Rated current/voltage

8A 250V

Operation limit voltage (AC.V.rms)

200

Withstanding voltage (AC.V.rms) 1
minute

1000

Insulation resistance (MΩ MIN.) at DC
500V

1000

Contact resistance (MΩ MAX.) AT DC
1A

3

Pin diameter (Ømm)

1.8

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)