




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

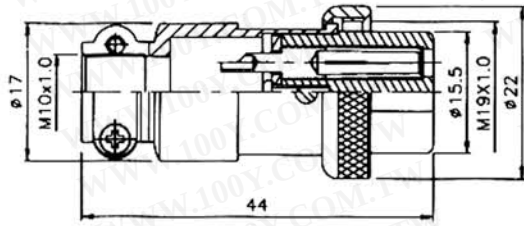



PLT-19-P

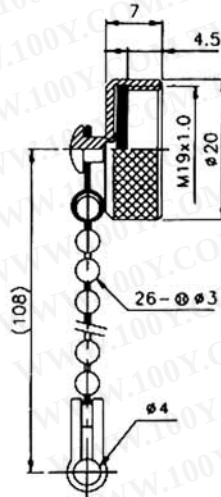

PLT-19-RCa




PLT-19-R

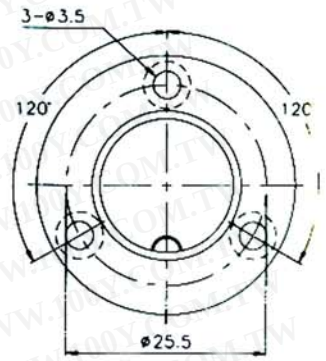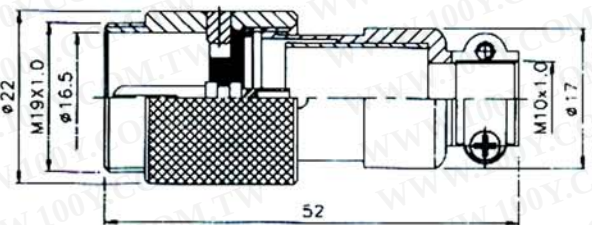


PLT-19-AD

No. of contacts	2	3	4						
Contacts Configuration									
Rated current/voltage	7A 250V	7A 250V	7A 250V						
Operation limit voltage (AC.V.rms)	250	250	250						
Withstanding voltage (AC.V.rms) 1 minute	1000	1000	1000						
Insulation resistance (MΩ MIN.) at DC 500V	1000	1000	1000						
Contact resistance (mΩ MAX.) at DC 1A	3	3	3						
Pin diameter (φmm)	1.7	1.7	1.7						

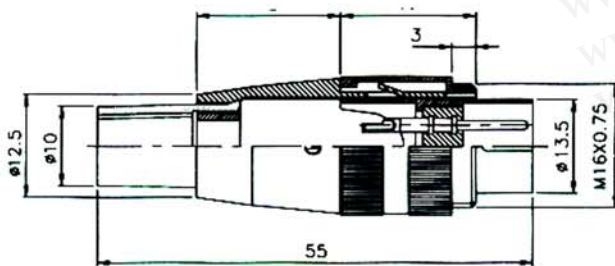

PLT-187-PM

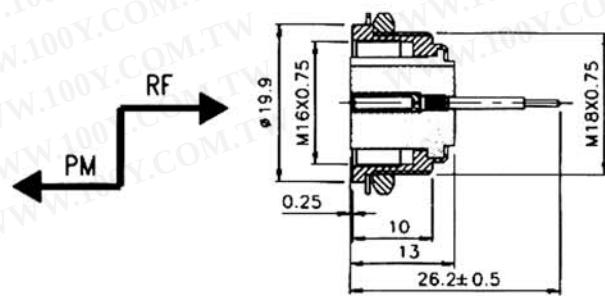

PLT-187-RF

