




INPUT TYPE

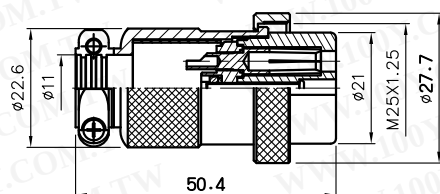

PLT-25-P

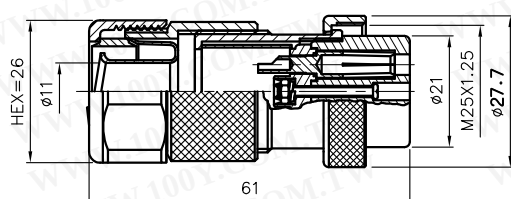


PLT-25-GP3/8

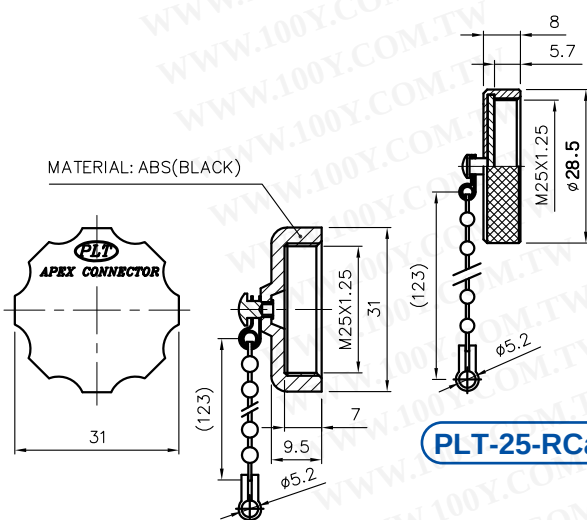


PLT-25-RCa

PLT-25A-RCa

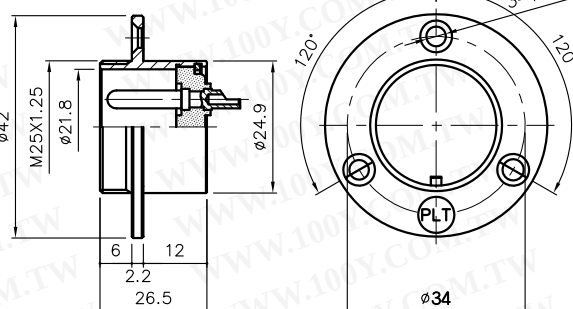

PLT-25-R

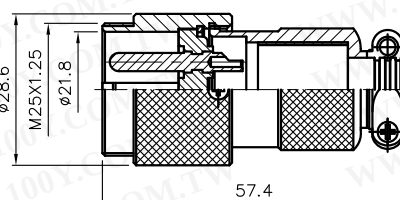

PLT-25-AD




PLT-25 Series


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

◆ No. of contacts	2	3	4	5	6		
Contacts Configuration							
Rated current / voltage	10A 250V	10A 250V	10A 250V	10A 250V	10A 250V		
Operation limit voltage (AC.V.rms)	400	400	400	400	300		
Withstanding voltage (AC.V.rms) 1 minute	2000	2000	2000	1800	1800		
Insulation resistance (MΩ MIN.) at DC 500V	2000	2000	2000	2000	2000		
Contact resistance (mΩ MAX.) at DC 1A	3	3	3	3	3		
Solder inter diameter	1.9	1.9	1.9	1.9	1.9		

OUTPUT TYPE


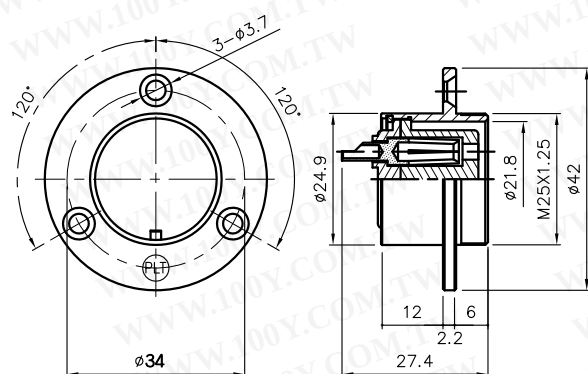


PLT-25-RF

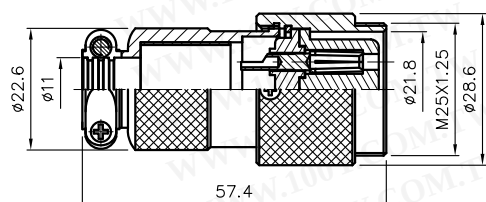


PLT-25-ADF


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

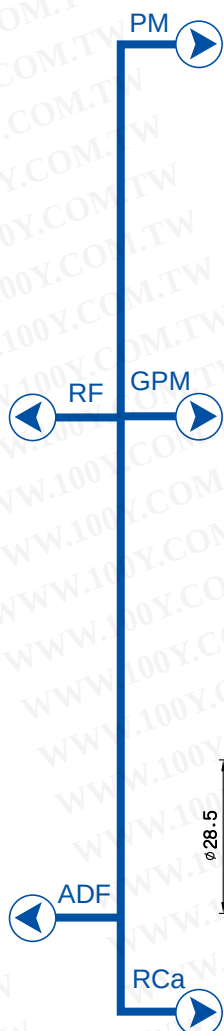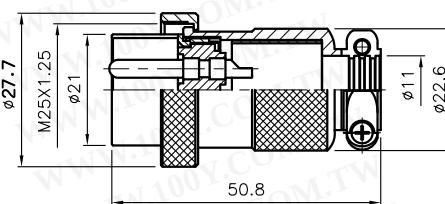

PLT-25-PM

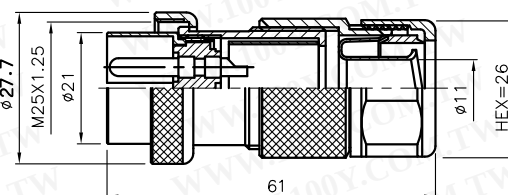

PLT-25-GPM3/8"

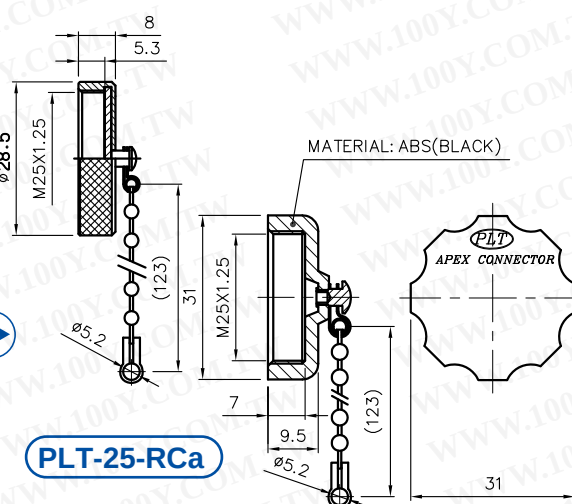

PLT-25-RCa

PLT-25A-RCa

No. of contacts	2	3	4	5	6		
Contacts Configuration							
Rated current / voltage	10A 250V	10A 250V	10A 250V	10A 250V	10A 250V		
Operation limit voltage (AC.V.rms)	400	400	400	400	300		
Withstanding voltage (AC.V.rms) 1 minute	2000	2000	2000	1800	1800		
Insulation resistance (M Ω MIN.) at DC 500V	2000	2000	2000	2000	2000		
Contact resistance (m Ω MAX.) at DC 1A	3	3	3	3	3		
Solder inter diameter	1.9	1.9	1.9	1.9	1.9		