



PLT-32-AD

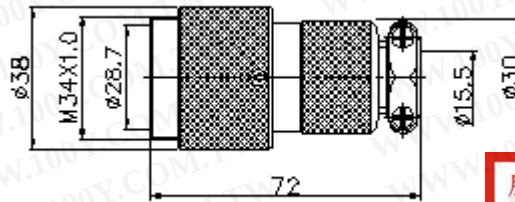


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


PLT-32-P

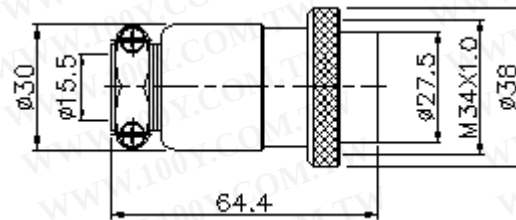

PLT-32-R

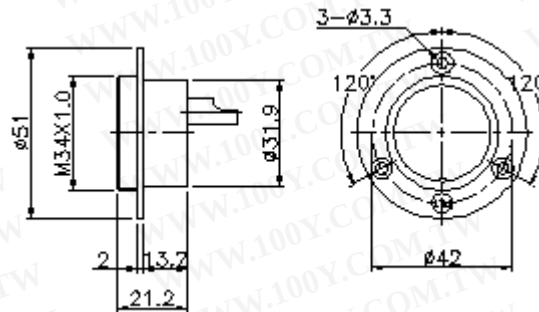

PLT-32-RCa



No. of contacts

Contacts
 Cofiguration

Rated current/voltage


Operation limit voltage (AC.V.rms)

Withstanding voltage (AC.V.rms) 1 minute

Insulation resistance (M Ω MIN.) at DC 500V

Contact resistance (M Ω MAX.) AT DC 1A

Pin diameter (ϕ mm)

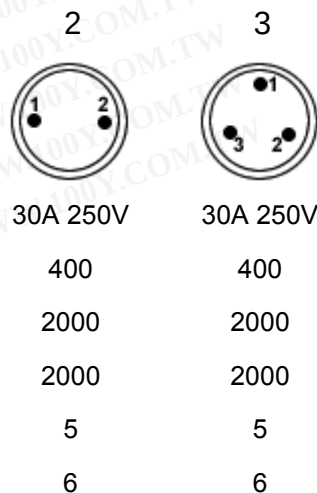

30A 250V

30A 250V

400

400

2000

2000

2000

2000

5

5

6

6