R13-243

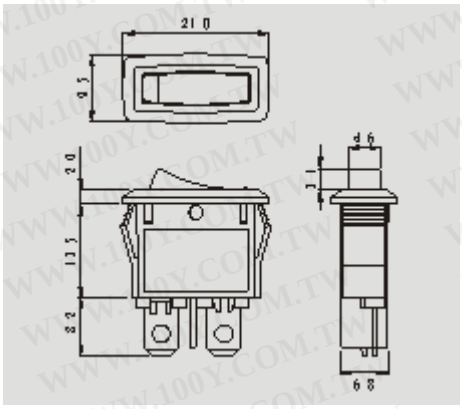

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

FEATURES

- MATERIAL: Frames are nylon with glass fiber(UL flame: 94HB).Terminals are silver plated brass.
- Illuminated actuators are molded in PC, available with red, amber, and green colors.

R13-243 □-□□

FUNCTION	TERMINAL
A	02 .187" Quick connect
E	
F	

Rating
10A 125V AC 6A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

X

Y

	X	Y
0.75~1.25	19.2-0.1	7.0+0.1
1.25~2	19.4-0.1	7.0+0.1
2~3	19.8-0.1	7.0+0.1