


R13-406

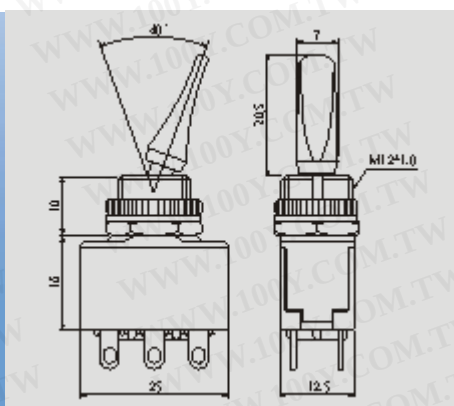

Rating

6A 125V AC

3A 250V AC

Contact

resistance

50mΩ Max

Insulation

resistance

DC 500V

100MΩ Min

Dielectric

strength


AC 1500V 1

minute

Cut-out

FEATURES

- MATERIAL: Plastic levers are ABS (UL flame: 94V-2). Bushing and frames are nylon (UL flame: 94V-2)
- Phenolic base.



4 mm max

R13-406


FUNCTION

LEVER

TERMINAL



0 5 Soder



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)