


R13-73

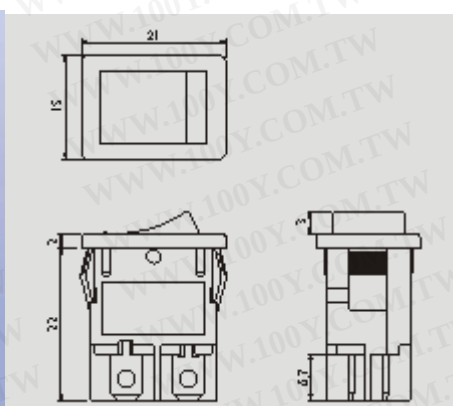

FEATURES

- MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- Illuminated actuators are molded in PC, available with red, amber, and green colors.
- Snap-in mounting, easy to install switch into panel.

Contact
resistance
10A 12V DC
Insulation
resistance
DC 500V
100MΩ Min
Dielectric
strength
AC 1500V 1
minute
Cut-out

X

Y

.2-0.	7.2-0.	.2-0.
	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2	19.4-0.1	13.0+0.1
2~3	19.8-0.1	13.0+0.1

R13-73



FUNCTION



TERMINAL

.187" Quick connect



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)