


勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

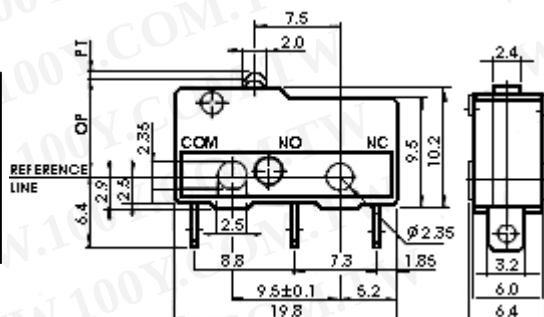

OF max.	150g
RF min.	55g
PT max.	0. 6mm
OT min.	0. 6mm
MD max.	0. 2mm
FP max.	9. 2mm
OP	8. 4 ± 0. 5mm
5A 125VAC, 3A 250VAC	


Technical drawing showing the front view of a 6-pin D-sub connector housing. Key dimensions and features include:

- Overall width: 19.8
- Pin pitch: 2.5
- Mounting hole diameter: $\phi 2.35$
- Reference line dimension: 6.4
- Pin labels: COM, NO, NC
- Dimensions for pin positions: 8.8, 7.3, 5.2
- Dimension for pin height: 9.5 ± 0.1
- Dimension for pin length: 14.5
- Dimension for pin thickness: $t=0.3$
- Dimension for pin offset: PT
- Dimension for pin offset: OP
- Dimension for pin offset: 9.5
- Dimension for pin offset: 10.2
- Dimension for pin offset: 4
- Dimension for pin offset: 3.2
- Dimension for pin offset: 6.0
- Dimension for pin offset: 6.4

OF max.	45g
RF min.	12g
PT max.	2. 8mm
OT min.	1. 4mm
MD max.	0. 8mm
FP max.	11. 9mm
OP	8. 8±0. 8mm
5A 125VAC, 3A 250VAC	


SM0502□

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

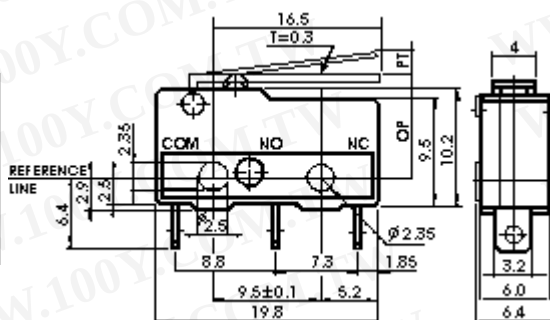



OF max.	38g
RF min.	12g
PT max.	3.1mm
OT min.	1.4mm
MD max.	0.8mm
FP max.	12.2mm
OP	8.8±0.8mm
5A 125VAC, 3A 250VAC	

SM0503□

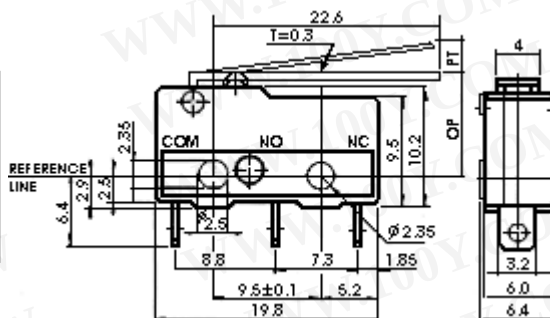

OF max.	30g
RF min.	12g
PT max.	4.2mm
OT min.	1.6mm
MD max.	1mm
FP max.	13.3mm
OP	8.8±1.2mm
5A 125VAC, 3A 250VAC	

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

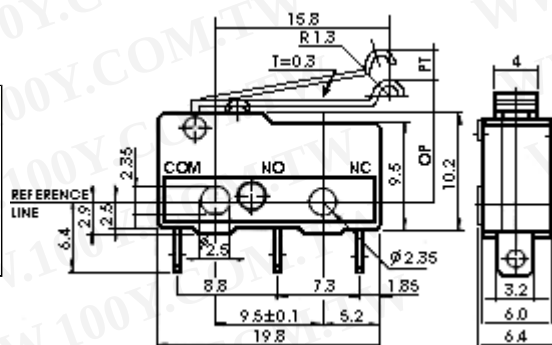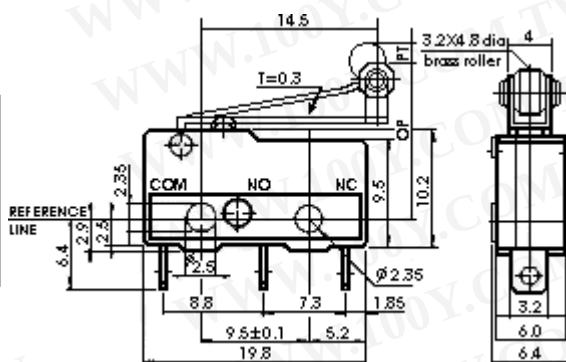SM0511□

OF max.	45g
RF min.	12g
PT max.	2. 8mm
OT min.	1. 4mm
MD max.	0. 8mm
FP max.	17. 6mm
OP	14. 5±0. 8mm
5A 125VAC, 3A 250VAC	

[Http://www.100y.com.tw](http://www.100y.com.tw)




圖		圖號
名		檔名