


Hook-Up Wire

UL1007

Construction

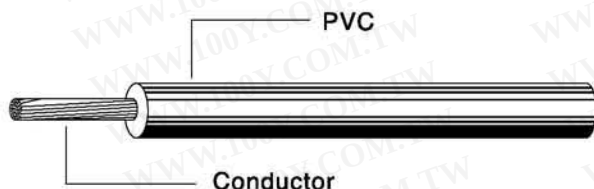

Product Description:

1. Tinned, annealed, stranded or solid copper conductor, 32-16AWG
2. Color-coded PVC insulation
3. Rated temperature: 80°C. Rated voltage: 300V
4. Passes UL VW-1 & CSA FT1 vertical flame test.
5. Uniform thickness of wire to ensure easy stripping and cutting.
6. Resistant to acids, oils, alkalies, moisture and fungus.

Application:

1. For general purpose internal wiring of electronic and electrical equipment.

UL Style & CSA Type	Conductor		Insulation Thickness	Overall Diameter
	AWG	No./mm	mm	mm
UL1007 CSA IA (Stranded)	30	7/0.102	0.41	1.10±0.10
	28	7/0.127		1.20±0.10
	26	7/0.160		1.30±0.10
	24	11/0.160		1.40±0.10
	22	17/0.160		1.60±0.10
	20	21/0.180		1.80±0.10
	18	34/0.180		2.10±0.10
	16	26/0.254		2.40±0.10
UL1007 CSA IA (Top-coated)	26	7/0.160		1.30±0.10
	24	7/0.203		1.40±0.10
	22	7/0.254		1.60±0.10
	20	7/0.320		1.80±0.10
	18	7/0.404		2.10±0.10
	16	7/0.488		2.30±0.10
UL1007 CSA IA (Solid)	26	1/0.404		1.25±0.10
	24	1/0.511		1.35±0.10
	22	1/0.643		1.50±0.10
	20	1/0.813		1.65±0.10
	18	1/1.024		1.85±0.10
	16	1/1.290		2.15±0.10

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)