
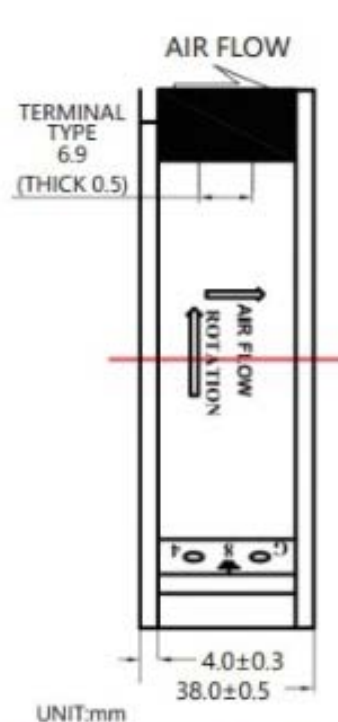


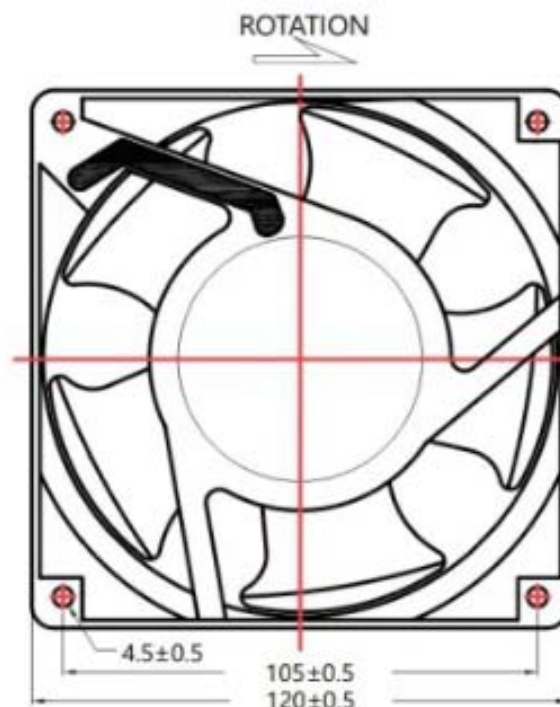

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

Model	Part Number	Bearing System	RATED Voltage	Freq.	Current	Input Power	Speed	Air Flow	Static Pressure	Noise Level	Weight
	Terminal / Leadwire /		VAC	Hz	AMP	WATT	R.P.M	CFM	mm-H ₂ O	dB-A	g
H1238HA1	H1238HA1SAT(L)	Sleeve	110	50/60	0.24/0.21	26.4/23.1	2600/3000	75/90	6.3/7.3	44/46	550
H1238HA1	H1238HA1BAT(L)	Ball	110	50/60	0.24/0.21	26.4/23.1	2600/3000	77/92	6.6/7.5	45/47	550
H1238HA2	H1238HA2SAT(L)	Sleeve	220	50/60	0.14/0.10	30.8/22.0	2600/3000	75/90	6.3/7.3	44/46	550
H1238HA2	H1238HA2BAT(L)	Ball	220	50/60	0.14/0.10	30.8/22.0	2600/3000	77/92	6.6/7.5	45/47	550