

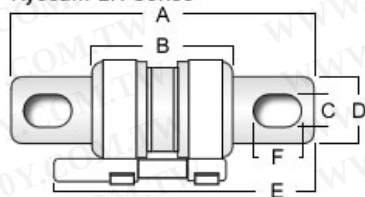




Kyosan: LK Series



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Type	A	B	C	D	E	F	G	K	L	P
25LKA20B~25LKA100B 25LKA20SB~25LKA1--SB	60	28	6.5	13.2	62	9.5	1.8	19	23	44
25LKB100B~25LKB225B 25LKB100SB~25LKA225SB	80	30	9	20	72	15	2.5	26	31	58
25LKB260B~25LKB350B 25LKB260B~25LKB350SB	86	33	11.8	25	75	16.8	3	33	41	58
66LKA20~66LKA75 66LKA60SB~25LKB350B	77	45	6.5	13.2	78	9.5	1.8	19	23	62
66LKB100~66LKB200 66LKB100ST~66LKB200ST	97	47	9	20	87	15	2.5	26	31	76
66LKB~66LKB300 66LKB235ST~66LKB300ST	103	50	11.8	25	25	16.8	3	33	41	76

Type Without Indicator	Type With Indicator	Voltage	Rated Current	Breaking Capacity
25LKA20B	25LKA20SB	AC 250 V Overload at 400%	20	AC Max 100kA at AC 250V
25LKA30B	25LKA30SB		30	
25LKA40B	25LKA40SB		40	
25LKA60B	25LKA60SB		50	
25LKA75B	25LKA75SB		60	
25LKA100B	25LKA100SB		75	
25LKB100B	25LKB100SB		100	
25LKB125B	25LKB125SB		125	
25LKB150B	25LKB150SB		150	
25LKA175B	25LKA175SB		175	
25LKB200B	25LKB200SB		200	
25LKB225B	25LKB225SB		225	
25LKB260B	25LKB260SB		260	
25LKB300B	25LKB300SB		300	
25LKB350B	25LKB350SB		350	
66LKA20	66LKA20ST	AC 660 V Overload at 500%	20	AC Max 100kA at AC 660V
66LKA30	66LKA30ST		30	
66LKA40	66LKA40ST		40	
66LKA50	66LKA50ST		50	
66LKA60	66LKA60ST		60	
66LKA75	66LKA75ST		75	
66LKB100	66LKB100ST		100	
66LKB125	66LKB125ST		125	
66LKB150	66LKB150ST		150	
66LKB175	66LKB175ST		175	
66LKB200	66LKB200ST		200	
66LKB235	66LKB235ST		235	
66LKB260	66LKB260ST		260	
66LKB300	66LKB300ST		300	