



CARRIER VIEW







勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

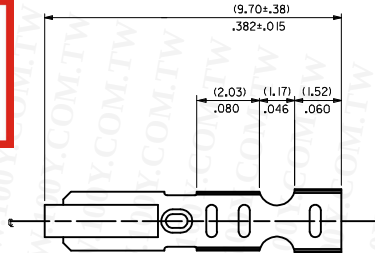


- NOTES:
1. MATERIAL:
(0.20)/.008 THICK BRASS
 2. FINISH:
122 - OVERALL TIN: (0.00381)/.000150 MIN. TIN OVER
(0.00076)/.000030 MIN NICKEL
154 - OVERALL TIN: (0.00254)/.000100 MIN. TIN OVER
(0.00127)/.000050 MIN NICKEL
P909 - OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
550 - SELECT GOLD: (0.000381)/.000015 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.
555- SELECT GOLD (0.000381)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030
558 - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
 3. PRODUCT SPEC: PS-10-07
 4. PACKAGING SPECIFICATION: LOOSE TERMINALS: PER PK-2759-001
CHAIN FORM TERMINALS: PER PK-2759-002
 5. CRIMP IS FOR 22-30 GA WIRE WITH (1.57)/.062 DIA INSULATION MAX.
 6. INSERTION FORCE OF TERMINAL INTO (2.54)/.100 CENTERLINE CONNECTOR IS 2.5 LBS. MAX
 7. TERMINAL RETENTION IN HOUSING IS 26.7N / 6LBS MIN. WHEN PULLED AT THE RATE OF (25.4MM) / 1 INCH PER MINUTE.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.



SELECT GOLD LOCATION

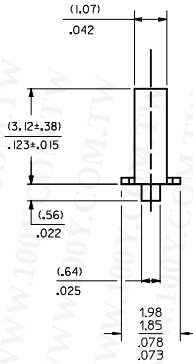

CRIMP DETAIL



CRIMPED TERMINAL 2759-IP9091C IS USED WITHOUT WIRE AND IS INSERTED INTO HOUSING TO PROVIDE TENSION WHEN ASSEMBLED TO HEADERS DURING SHIPMENT.



2759-****

FORM
L=LOOSE
C=LOOSE CRIMPED
A=CHAIN, PER WINDING DETAIL "A"
B=CHAIN, PER WINDING DETAIL "B"
PLATING
SEE NOTE 2

ADD WINDING DETAIL			QUALITY SYMBOLS			GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE			SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION						
EC NO: UCP2014-4131			2014/04/07			2014/04/08			MM/IN					INCH								
DRWN:KIPER			CHKD:GUVEN			APPR:FSMTH			DRAWN BY			DATE		TITLE								
AW2			▽=0			4 PLACES ±---			±---			SAMIEC			07/28/87		CRIMP TERMINAL 22-30 GA WIRE					
			▽=0			3 PLACES ±---			±---			±.010			CHECKED BY						DATE	
			▽=0			2 PLACES ±0.25			±.014			PATEL			07/28/87							
			▽=0			1 PLACE ±0.36			±---			APPROVED BY			DATE							
			▽=0			0 PLACE ±---			±---			FSMITH			2012/03/20							
						ANGULAR ±1/2°			MATERIAL NO.			DOCUMENT NO.										
						DRAFT WHERE APPLICABLE			SEE CHART			SD-2759		SHEET NO. 1 OF 2								
						MUST REMAIN WITHIN DIMENSIONS			SIZE			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

