


圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL: COPPER




线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 英寸 DIMENSION inch mm							
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T	
22-16 A.W.G. 0.5-1.5 mm ²	RNB1-3.2	#4	.126 3.2	.216 5.5	.197 5.0	.492 12.5	.189 4.8	.134 3.4	.067 1.7	.030 0.75	
	RNBS1-3.7	#6	.146 3.7								
	RNBM1-3.7	#6	.146 3.7	.260 6.6	.248 6.3	.567 14.4					
	RNBL1-3.7	#6	.146 3.7	.315 8.0	.276 7.0	.622 15.8					
	RNBS1-4	#8	.169 4.3	.260 6.6	.248 6.3	.567 14.4					
	RNBL1-4	#8	.169 4.3	.315 8.0	.276 7.0	.622 15.8					
	RNB1-5	#10	.209 5.3								
	RNBL1-5	#10	.209 5.3								
	RNB1-6	1/4	.252 6.4	.457 11.6	.433 11.0	.858 21.8					
	RNB1-8	5/16	.331 8.4								
	RNB1-10	3/8	.413 10.5	.535 13.6	.547 13.9	1.004 25.5					
	RNB1-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.197 30.4					
	RNB1-14	9/16	.591 15.0								
	RNB1-16	5/8	.669 17.0	1.063 27.0	.827 21.0	1.547 39.3					.031 0.8
	RNB1-20	3/4	.827 21.0								
16-14 A.W.G. 1.5-2.5 mm ²	RNB2-3.2	#4	.126 3.2		.189 4.8	.504 12.8	.189 4.8	.161 4.1	.091 2.3	.031 0.8	
	RNBS2-3.7	#6	.146 3.7	.260 6.6							
	RNBM2-3.7	#6	.146 3.7		.248 6.3	.567 14.4					
	RNBL2-3.7	#6	.146 3.7	.335 8.5	.307 7.8	.661 16.8					
	RNBS2-4	#8	.169 4.3	.260 6.6	.248 6.3	.567 14.4					
16-14 A.W.G. 1.5-2.5 mm ²	RNBL-2.4	#8	.169 4.3	.335 8.5	.307 7.8	.661 16.8	.189 4.8	.161 4.1	.091 2.3	.031 0.8	
	RNBS2-5	#10	.209 5.3								
	RNBL2-5	#10	.209 5.3	.374 9.5	.287 7.3						
	RNB2-6	1/4	.252 6.4	.472 12.0	.433 11.0	.858 21.8					
	RNB2-8	5/16	.331 8.4	.472 12.0	.433 11.0	.858 21.8					
	RNB2-10	3/8	.413 10.5	.535 13.6	.547 13.9	1.004 25.5					
	RNB2-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.197 30.4					
	RNB2-14	9/16	.591 15.0								
	RNB2-16	5/8	.669 17.0	1.063 27.0	.827 21.0	1.547 39.3					
	RNB2-20	3/4	.827 21.0								

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL: COPPER




线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM NO.	饰钮尺寸 STUD SIZE		尺寸 英寸 DIMENSION inch mm						
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T
14-12 A.W.G. 2.5-4 mm ²	RNB3-4	#8	.169 4.3	.315 8.0	.303 7.7	.709 18.0	.236 6.0	.201 5.1	.114 2.9	.039 1.0
	RNBS3-5	#10	.209 5.3							
	RNBL3-5	#10	.209 5.3	.472 12.0	.370 9.4	.843 21.4				
	RNB3-6	1/4	.252 6.4							
12-10 A.W.G. 4-6 mm ²	RNB5-3.7	#6	.148 3.7	.283 7.2	.240 6.1	.618 15.7	.236 6.0	.220 5.6	.134 3.4	.039 1.0
	RNBS5-4	#8	.169 4.3							
	RNBL5-4	#8	.169 4.3	.374 9.5	.358 9.1	.772 19.6				
	RNB5-5	#10	.209 5.3							
	RNB5-6	1/4	.252 6.4	.472 12.0	.413 10.5	.886 22.5				
	RNBM5-6	1/4	.252 6.4		.512 13.0	.984 25.0				
	RNB5-8	5/16	.331 8.4	.591 15.0	.531 13.5	1.063 27.0				
	RNB5-10	3/8	.413 10.5							
12-10 A.W.G. 4-6mm ²	RNB5-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.244 31.6	.236 6.0	.220 5.6	.134 3.4	.039 1.0
	RNB5-14	9/16	.591 15.0							
	RNB5-16	5/8	.669 17.0	1.260 32.0	.992 25.2	1.858 47.2				
	RNB5-20	3/4	.827 21.0							
8 A.W.G. 8 mm ²	RNB8-3.7	#6	.148 3.7	.315 8.0	.366 9.3	.846 21.5	.337 8.5	.283 7.2	.177 4.5	.047 1.2
	RNBS8-4	#8	.169 4.3							
	RNBL8-4	#8	.169 4.3	.472 12.0	.366 9.3					
	RNBS8-5	#10	.209 5.3	.346 8.8	.429 10.5	.937 23.8				
	RNBM8-5	#10	.209 5.3	.472 12.0	.366 9.3					
	RNBL8-5	#10	.209 5.3	.591 15.0	.543 13.8	1.173 29.8				
	RNBS8-6	1/4	.252 6.4	.472 12.0	.366 9.3	.937 23.8				
	RNBL8-6	1/4	.252 6.4							
	RNB8-8	5/16	.331 8.4	.591 15.0	.543 13.8	1.161 29.8				
	RNB8-10	3/8	.413 10.5							
	RNB8-12	1/2	.512 13.0	.787 20.0	.591 15.0	1.319 33.5				

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL: COPPER




线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION							英寸 inch mm
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T	
6 A.W.G. 14 mm ²	RNB14-4	#8	.169 4.3	.472 12.0	.524 13.3	1.173 29.8	.413 10.5	.354 9.0	.222 5.65	.059 1.5	
	RNB14-5	#10	.209 5.3								
	RNBS14-6	1/4	.252 6.4	.630 16.0	.559 14.2	1.280 32.5					
	RNBL14-6	1/4	.252 6.4								
	RNB14-8	5/16	.331 8.4								
	RNB14-10	3/8	.413 10.5								
6 A.W.G. 14mm ²	RNB14-11	7/16	.453 11.5	.866 22.0	.780 19.8	1.614 41.0	.413 10.5	.354 9.0	.222 5.65	.059 1.5	
RNB14-12	1/2	.512 13.0									
4 A.W.G. 22mm ²	RNB22-4	#8	.169 4.3	.866 12.2	.594 15.1	1.307 33.2	.472 12.0	.453 11.5	.303 7.7	.067 1.8	
	RNBS22-5	#10	.209 5.3								
	RNBL22-5	#10	.209 5.3	.650 16.5	.531 13.5	1.319 33.5					
	RNBS22-6	1/4	.252 6.4								.866 12.2
	RNBL22-6	1/4	.252 6.4	.650 16.5	.531 13.5	1.319 33.5					
	RNB22-8	5/16	.331 8.4								
	RNB22-10	3/8	.413 10.5								
	RNB22-11	7/16	.453 11.5	.866 22.0	.776 19.7	1.661 42.5					
	RNB22-12	1/2	.512 13.0								
	2A.W.G. 38 mm ²	RNB38-5	#10	.209 5.3	.602 15.3	.685 17.4					1.535 39.0
RNBS38-6		1/4	.252 6.4								
RNBL38-6		1/4	.252 6.4	.866 22.0	.697 17.7	1.681 42.7					
RNBS38-8		5/16	.331 8.4				.602 15.3	.685 17.4	1.535 39.0		
RNBL38-8		5/16	.331 8.4	.866 22.0	.697 17.7	1.681 42.7					
RNBS38-10		3/8	.413 10.5				.602 15.3	.685 17.4	1.535 39.0		
RNBL38-10		3/8	.413 10.5	.866 22.0	.697 17.7	1.681 42.7					
RNB38-11		7/16	.453 11.5								
RNB38-12		1/2	.512 13.0								

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL: COPPER




线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 英寸 DIMENSION inch mm						
	焊 缝 WELDING SEAM	◆		B	F	L	E	D	C	T
1/0 A.W.G. 60 mm ²	RNB60-6	1/4	.252 6.4	.866 22.0	.815 20.7	1.957 49.7	.709 18.0	.606 15.4	.449 11.4	.071 1.8
	RNB60-8	5/16	.331 8.4							
	RNB60-10	3/8	.413 10.5							
	RNB60-11	7/16	.453 11.5							
	RNB60-12	1/2	.512 13.0	1.260 32.0	.925 23.5	2.264 57.5				
	RNB60-13	9/16	.551 14.0							
	RNB60-14	9/16	.591 15.0							
	RNB60-16	5/8	.669 17.0							
	RNB60-18	11/16	.748 19.0							
	RNB60-20	3/4	.827 21.0							
	RNB60-22	7/8	.906 23.0							
2/0 A.W.G. 70mm ²	RNB70-6	1/4	.252 6.4	.945 24.0	.787 20.0	1.969 50.0	.709 18.0	.689 17.5	.524 13.3	.079 2.2
	RNB70-8	5/16	.331 8.4							
	RNB70-10	3/8	.413 10.5							
	RNB70-11	7/16	.453 11.5							
	RNB70-12	1/2	.512 13.0	1.260 32.0	1.024 26.0	2.402 61.0				
	RNB70-13	9/16	.551 14.0							
	RNB70-14	9/16	.591 15.0							
	RNB70-16	5/8	.669 17.0							
	RNB70-18	11/16	.748 19.0							
	RNB70-20	3/4	.827 21.0							
	RNB70-22	7/8	.906 23.0							

勝 特 力 材 料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL: COPPER

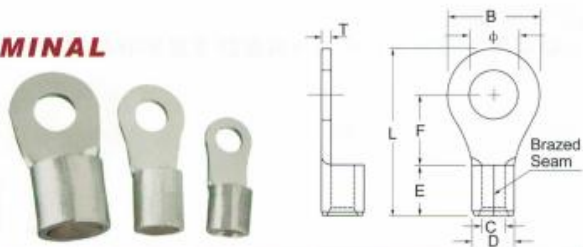


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION 英寸 inch mm									
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T			
3/0 A.W.G. 80 mm ²	RNB80-6	1/4	.252 6.4	1.063 27.0	.815 20.7	2.134 54.2	.787 20.0	.768 19.5	.571 14.5	.091 2.2			
	RNB80-8	5/16	.331 8.4										
	RNB80-10	3/8	.413 10.5										
	RNB80-11	7/16	.453 11.5										
	RNB80-12	1/2	.512 13.0										
	RNB80-13	9/16	.551 14.0										
	RNB80-14	9/16	.591 15.0	1.260 32.0	1.260 32.0	2.677 68.0							
	RNB80-16	5/8	.669 17.0										
	RNB80-18	11/16	.748 19.0										
	RNB80-20	3/4	.827 21.0										
	RNB80-22	7/8	.906 23.0										
4/0 A.W.G. 100mm ²	RNB100-6	1/4	.252 6.4	1.122 28.5	.801 20.4	2.189 55.6	.827 21.0	.870 22.1	.646 16.4	.106 2.6			
	RNB100-8	5/16	.331 8.4										
	RNB100-10	3/8	.413 10.5										
	RNB100-11	7/16	.453 11.5										
	RNB100-12	1/2	.512 13.0										
	RNB100-14	9/16	.591 15.0	1.260 32.0	1.260 32.0	2.717 69.0							
	RNB100-16	5/8	.669 17.0										
	RNB100-18	11/16	.748 19.0										
	RNB100-20	3/4	.827 21.0										
	RNB100-22	7/8	.906 23.0										

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL: COPPER




线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T
250/300 MCM A.W.G. 150 mm ²	RNB150-8	5/16	.331 8.4	1.417 36.0	.906 23.0	2.599 66.0	1.063 27.0	1.047 26.6	.768 19.5	.126 3.2
	RNB150-10	3/8	.413 10.5							
	RNB150-11	7/16	.453 11.5							
	RNB150-12	1/2	.512 13.0							
	RNB150-14	9/16	.591 15.0							
	RNB150-16	5/8	.669 17.0	1.417 36.0	1.417 36.0	6.189 81.0	1.122 28.5	1.126 28.6	.827 21.0	.138 3.6
	RNB150-18	11/16	.748 19.0							
	RNB150-20	3/4	.827 21.0							
	RNB150-22	7/8	.906 23.0							
	RNB150-24	15/16	.984 25.0							
	RNB150-27	1	1.102 28.0							
300/350 MCM A.W.G. 180mm ²	RNB180-8	5/16	.331 8.4	1.516 38.5	.965 24.5	2.717 69.0	1.122 28.5	1.126 28.6	.827 21.0	.138 3.6
	RNB180-10	3/8	.413 10.5							
	RNB180-11	7/16	.453 11.5							
	RNB180-12	1/2	.512 13.0							
	RNB180-14	9/16	.591 15.0							
	RNB180-16	5/8	.669 17.0	1.516 38.5	1.535 39.0	3.409 86.6	1.122 28.5	1.126 28.6	.827 21.0	.138 3.6
	RNB180-18	11/16	.748 19.0							
	RNB180-20	3/4	.827 21.0							
	RNB180-22	7/8	.906 23.0							
	RNB180-24	15/16	.984 25.0							
	RNB180-27	1	1.102 28.0							

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL: COPPER



线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM NO.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm
	焊 缝 WELDING SEAM	φ		B	F	L	E	D	C	T
400/500 MCM A.W.G. 200 mm ²	RNB200-8	5/16	.331 8.4	1.732 44.0	.965 24.5	2.835 72.0	1.240 31.5	1.283 32.6	.945 24.0	.157 4.0
	RNB200-10	3/8	.413 10.5							
	RNB200-11	7/16	.453 11.5							
	RNB200-12	1/2	.512 13.0							
	RNB200-14	9/16	.591 15.0							
	RNB200-16	5/8	.669 17.0							
	RNB200-18	11/16	.748 19.0	1.732 44.0	1.476 37.5	3.583 91.0	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.2
	RNB200-20	3/4	.827 21.0							
	RNB200-22	7/8	.906 23.0							
	RNB200-24	15/16	.984 25.0							
	RNB200-27	1	1.102 28.0							
500/600 MCM A.W.G. 325mm ²	RNB325-8	5/16	.331 8.4	1.988 50.5	1.319 33.5	3.465 88.0	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.2
	RNB325-10	3/8	.413 10.5							
	RNB325-11	7/16	.453 11.5							
	RNB325-12	1/2	.512 13.0							
	RNB325-14	9/16	.591 15.0							
	RNB325-16	5/8	.669 17.0							
	RNB325-18	11/16	.748 19.0	1.988 50.5	1.772 45.0	4.161 105.7	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.2
	RNB325-20	3/4	.827 21.0							
	RNB325-22	7/8	.906 23.0							
	RNB325-24	15/16	.984 25.0							
	RNB325-27	1	1.102 28.0							

勝 特 力 材 料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)