


### Uninsulated Ring Terminals

1. TERMINAL MATERIAL : COPPER
2. BRAZED SEAM
3. PLATING : ELECTRO TIN PLATED

| Next Pro.

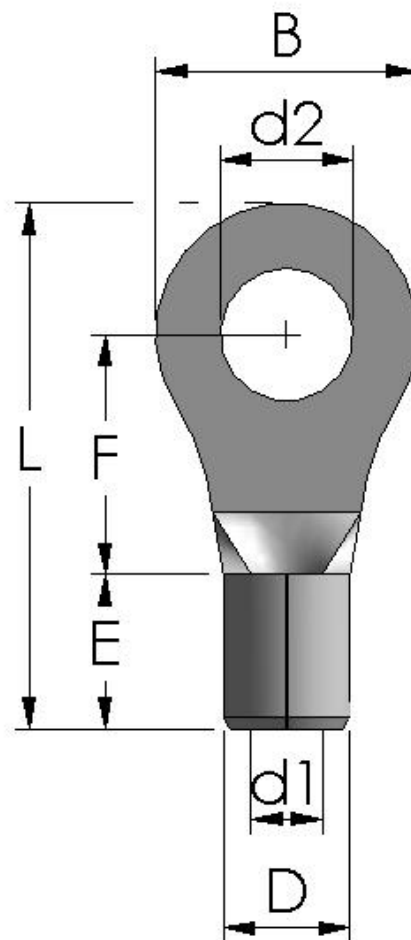

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-2SNB   |    | #2 (2.2)        | 5.50      | 11.70     | 4.0       | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-2NB    | ★  | #2 (2.2)        | 6.60      | 14.60     | 6.30      | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-3NB    | ★  | #4 (3.2)        | 5.50      | 11.70     | 4.0       | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-3.5SNB | ★  | #6 (3.7)        | 5.50      | 11.70     | 4.0       | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-3.5MNB | ★  | #6 (3.7)        | 6.60      | 14.60     | 6.30      | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-3.5LNB | ★  | #6 (3.7)        | 8.0       | 16.0      | 7.0       | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-4SNB   | ★  | #8 (4.3)        | 6.60      | 14.60     | 6.30      | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-4LNB   | ★  | #8 (4.3)        | 8.0       | 16.0      | 7.0       | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-5NB    | ★  | #10 (5.3)       | 8.0       | 16.0      | 7.0       | 5.0       | 3.40      | 1.70       | 0.75      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-6NB    | ★  | 1/4 (6.5)       | 11.60     | 21.80     | 11.10     | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-8NB    | ★  | 5/16 (8.4)      | 11.60     | 21.80     | 11.10     | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-10NB   | ★  | 3/8 (10.5)      | 13.60     | 25.70     | 13.90     | 5.0       | 3.40      | 1.70       | 0.75      |
| 22~16<br>0.5~1.5                    | <input type="checkbox"/> R1-12NB   | ★  | 1/2 (13.0)      | 19.20     | 30.60     | 16.0      | 5.0       | 3.40      | 1.70       | 0.75      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-2NB    | ★  | #2 (2.2)        | 6.40      | 12.50     | 4.30      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-3NB    | ★  | #4 (3.2)        | 6.40      | 12.50     | 4.30      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-3.5SNB | ★  | #6 (3.7)        | 6.40      | 12.50     | 4.30      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-3.5MNB | ★  | #6 (3.7)        | 6.60      | 14.50     | 6.30      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-3.5LNB | ★  | #6 (3.7)        | 8.50      | 17.0      | 7.80      | 5.0       | 4.10      | 2.30       | 0.80      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                         | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|----------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-4SNB | ★  | #8 (4.3)        | 6.60      | 14.50     | 6.30      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-4LNB | ★  | #8 (4.3)        | 8.50      | 17.0      | 7.80      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-5SNB | ★  | #10 (5.3)       | 8.50      | 17.0      | 7.80      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-5LNB | ★  | #10 (5.3)       | 9.50      | 17.0      | 7.30      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-6NB  | ★  | 1/4 (6.5)       | 12.0      | 22.0      | 11.0      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-8NB  | ★  | 5/16 (8.4)      | 12.0      | 22.0      | 11.0      | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-10NB | ★  | 3/8 (10.5)      | 13.60     | 25.70     | 13.90     | 5.0       | 4.10      | 2.30       | 0.80      |
| 16~14<br>1.5~2.5                    | <input type="checkbox"/> R2-12NB | ★  | 1/2 (13.0)      | 19.20     | 30.60     | 16.0      | 5.0       | 4.10      | 2.30       | 0.80      |
| 14~12<br>2.5~4                      | <input type="checkbox"/> R3-4NB  | ★  | #8 (4.3)        | 8.0       | 17.70     | 7.70      | 6.0       | 5.0       | 2.80       | 1.0       |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 14~12<br>2.5~4                      | <input type="checkbox"/> R3-5SNB   | ★  | #10 (5.3)       | 8.0       | 17.70     | 7.70      | 6.0       | 5.0       | 2.80       | 1.0       |
| 14~12<br>2.5~4                      | <input type="checkbox"/> R3-5LNB   | ★  | #10 (5.3)       | 12.0      | 21.40     | 9.40      | 6.0       | 5.0       | 2.80       | 1.0       |
| 14~12<br>2.5~4                      | <input type="checkbox"/> R3-6NB    | ★  | 1/4 (6.5)       | 12.0      | 21.40     | 9.40      | 6.0       | 5.0       | 2.80       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-3NB    | ★  | #4 (3.2)        | 7.20      | 15.50     | 5.90      | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-3.5SNB | ★  | #6 (3.7)        | 7.20      | 15.50     | 5.90      | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-3.5LNB | ★  | #6 (3.7)        | 9.50      | 19.0      | 8.30      | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-4SNB   | ★  | #8 (4.3)        | 7.20      | 15.50     | 5.90      | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-4LNB   | ★  | #8 (4.3)        | 9.50      | 19.0      | 8.30      | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-5NB    | ★  | #10 (5.3)       | 9.50      | 19.0      | 8.30      | 6.0       | 5.60      | 3.40       | 1.0       |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                          | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|-----------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 12~10<br>4~6                        | <input type="checkbox"/> R5-6NB   | ★  | 1/4 (6.5)       | 12.0      | 22.50     | 10.50     | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-8NB   | ★  | 5/16 (8.4)      | 15.0      | 27.20     | 13.70     | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-10NB  | ★  | 3/8 (10.5)      | 15.0      | 27.20     | 13.70     | 6.0       | 5.60      | 3.40       | 1.0       |
| 12~10<br>4~6                        | <input type="checkbox"/> R5-12NB  | ★  | 1/2 (13.0)      | 19.20     | 31.60     | 16.0      | 6.0       | 5.60      | 3.40       | 1.0       |
| 8<br>8                              | <input type="checkbox"/> R8-3.5NB | ★  | #6 (3.7)        | 8.80      | 22.50     | 9.70      | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-4SNB  | ★  | #8 (4.3)        | 8.80      | 22.50     | 9.70      | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-4LNB  | ★  | #8 (4.3)        | 12.0      | 23.50     | 9.70      | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-5SNB  | ★  | #10 (5.3)       | 8.80      | 22.50     | 9.70      | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-5MNB  | ★  | #10 (5.3)       | 12.0      | 23.50     | 9.70      | 8.50      | 7.10      | 4.50       | 1.20      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                         | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|----------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 8<br>8                              | <input type="checkbox"/> R8-5LNB | ★  | #10 (5.3)       | 15.0      | 29.50     | 13.80     | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-6SNB | ★  | 1/4 (6.5)       | 12.0      | 23.50     | 9.70      | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-6LNB | ★  | 1/4 (6.5)       | 15.0      | 29.50     | 13.80     | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-8NB  | ★  | 5/16 (8.4)      | 15.0      | 29.50     | 13.80     | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-10NB | ★  | 3/8 (10.5)      | 15.0      | 29.50     | 13.80     | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-12NB | ★  | 1/2 (13.0)      | 20.0      | 33.50     | 15.0      | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-14NB | ★  | 9/16 (15.0)     | 31.60     | 49.50     | 25.60     | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-16NB | ★  | 5/8 (17.0)      | 31.60     | 49.50     | 25.60     | 8.50      | 7.10      | 4.50       | 1.20      |
| 8<br>8                              | <input type="checkbox"/> R8-18NB | ★  | 11/16 (19.0)    | 31.60     | 49.50     | 25.60     | 8.50      | 7.10      | 4.50       | 1.20      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                          | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|-----------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 8<br>8                              | <input type="checkbox"/> R8-20NB  | ★  | 3/4 (21.0)      | 31.60     | 49.50     | 25.60     | 8.50      | 7.10      | 4.50       | 1.20      |
| 6<br>14                             | <input type="checkbox"/> R14-4NB  | ★  | #8 (4.3)        | 12.0      | 29.20     | 13.30     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-5NB  | ★  | #10 (5.3)       | 12.0      | 29.20     | 13.30     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-6SNB | ★  | 1/4 (6.5)       | 12.0      | 29.20     | 13.30     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-6LNB | ★  | 1/4 (6.5)       | 16.0      | 32.50     | 14.20     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-8NB  | ★  | 5/16 (8.4)      | 16.0      | 32.50     | 14.20     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-10NB | ★  | 3/8 (10.5)      | 16.0      | 32.50     | 14.20     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-12NB | ★  | 1/2 (13.0)      | 22.0      | 41.0      | 19.80     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-14NB | ★  | 9/16 (15.0)     | 31.60     | 51.0      | 25.30     | 10.50     | 9.0       | 5.80       | 1.50      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                          | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|-----------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 6<br>14                             | <input type="checkbox"/> R14-16NB | ★  | 5/8 (17.0)      | 31.60     | 51.0      | 25.30     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-18NB | ★  | 11/16 (19.0)    | 31.60     | 51.0      | 25.30     | 10.50     | 9.0       | 5.80       | 1.50      |
| 6<br>14                             | <input type="checkbox"/> R14-20NB | ★  | 3/4 (21.0)      | 31.60     | 51.0      | 25.30     | 10.50     | 9.0       | 5.80       | 1.50      |
| 4<br>22                             | <input type="checkbox"/> R22-4NB  | ★  | #8 (4.3)        | 12.20     | 32.50     | 15.10     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-5SNB | ★  | #10 (5.3)       | 12.20     | 32.50     | 15.10     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-5LNB | ★  | #10 (5.3)       | 16.50     | 32.80     | 13.50     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-6SNB | ★  | 1/4 (6.5)       | 12.20     | 32.50     | 15.10     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-6LNB | ★  | 1/4 (6.5)       | 16.50     | 32.80     | 13.50     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-8NB  | ★  | 5/16 (8.4)      | 16.50     | 32.80     | 13.50     | 12.0      | 11.50     | 7.70       | 1.70      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 4<br>22                             | <input type="checkbox"/> R22-10NB  | ★  | 3/8 (10.5)      | 16.50     | 32.80     | 13.50     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-10LNB | ★  | 3/8 (10.5)      | 17.50     | 36.70     | 16.0      | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-12NB  | ★  | 1/2 (13.0)      | 22.0      | 42.50     | 19.70     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-14NB  | ★  | 9/16 (15.0)     | 30.0      | 51.0      | 24.20     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-16NB  | ★  | 5/8 (17.0)      | 30.0      | 51.0      | 24.20     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-18NB  | ★  | 11/16 (19.0)    | 30.0      | 51.0      | 24.20     | 12.0      | 11.50     | 7.70       | 1.70      |
| 4<br>22                             | <input type="checkbox"/> R22-20NB  | ★  | 3/4 (21.0)      | 30.0      | 51.0      | 24.20     | 12.0      | 11.50     | 7.70       | 1.70      |
| 2<br>38                             | <input type="checkbox"/> R38-5NB   | ★  | #10 (5.3)       | 15.30     | 39.0      | 17.40     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-6SNB  | ★  | 1/4 (6.5)       | 15.30     | 39.0      | 17.40     | 14.0      | 13.30     | 9.40       | 1.80      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 2<br>38                             | <input type="checkbox"/> R38-8SNB  | ★  | 5/16 (8.4)      | 15.30     | 39.0      | 17.40     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-8LNB  | ★  | 5/16 (8.4)      | 22.0      | 42.70     | 17.70     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-10SNB | ★  | 3/8 (10.5)      | 15.30     | 39.0      | 17.40     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-10LNB | ★  | 3/8 (10.5)      | 22.0      | 42.70     | 17.70     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-12NB  | ★  | 1/2 (13.0)      | 22.0      | 42.70     | 17.70     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-14NB  | ★  | 9/16 (15.0)     | 30.0      | 52.0      | 23.30     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-16NB  | ★  | 5/8 (17.0)      | 30.0      | 52.0      | 23.30     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-18NB  | ★  | 11/16 (19.0)    | 30.0      | 52.0      | 23.30     | 14.0      | 13.30     | 9.40       | 1.80      |
| 2<br>38                             | <input type="checkbox"/> R38-20NB  | ★  | 3/4 (21.0)      | 30.0      | 52.0      | 23.30     | 14.0      | 13.30     | 9.40       | 1.80      |
| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
| 1/0<br>60                           | <input type="checkbox"/> R60-6NB   | ★  | 1/4 (6.5)       | 22.0      | 49.70     | 20.70     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-8NB   | ★  | 5/16 (8.4)      | 22.0      | 49.70     | 20.70     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-10NB  | ★  | 3/8 (10.5)      | 22.0      | 49.70     | 20.70     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-12NB  | ★  | 1/2 (13.0)      | 22.0      | 49.70     | 20.70     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-14NB  | ★  | 9/16 (15.0)     | 32.0      | 57.50     | 23.50     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-16NB  | ★  | 5/8 (17.0)      | 32.0      | 57.50     | 23.50     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-18NB  | ★  | 11/16 (19.0)    | 32.0      | 57.50     | 23.50     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-20NB  | ★  | 3/4 (21.0)      | 32.0      | 57.50     | 23.50     | 18.0      | 15.40     | 11.40      | 1.80      |
| 1/0<br>60                           | <input type="checkbox"/> R60-22NB  | ★  | 7/8 (23.0)      | 32.0      | 57.50     | 23.50     | 18.0      | 15.40     | 11.40      | 1.80      |
| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
| 2/0<br>70                           | <input type="checkbox"/> R70-6NB   | ★  | 1/4 (6.5)       | 24.0      | 50.0      | 20.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-8NB   | ★  | 5/16 (8.4)      | 24.0      | 50.0      | 20.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-10NB  | ★  | 3/8 (10.5)      | 24.0      | 50.0      | 20.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-12NB  | ★  | 1/2 (13.0)      | 24.0      | 50.0      | 20.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-14NB  | ★  | 9/16 (15.0)     | 32.0      | 60.0      | 26.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-16NB  | ★  | 5/8 (17.0)      | 32.0      | 60.0      | 26.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-18NB  | ★  | 11/16 (19.0)    | 32.0      | 60.0      | 26.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-20NB  | ★  | 3/4 (21.0)      | 32.0      | 60.0      | 26.0      | 18.0      | 17.50     | 13.30      | 2.0       |
| 2/0<br>70                           | <input type="checkbox"/> R70-22NB  | ★  | 7/8 (23.0)      | 32.0      | 60.0      | 26.0      | 18.0      | 17.50     | 13.30      | 2.0       |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                          | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|-----------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 3/0<br>80                           | <input type="checkbox"/> R80-6NB  | ★  | 1/4 (6.5)       | 27.0      | 54.20     | 20.70     | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-8NB  | ★  | 5/16 (8.4)      | 27.0      | 54.20     | 20.70     | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-10NB | ★  | 3/8 (10.5)      | 27.0      | 54.20     | 20.70     | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-12NB | ★  | 1/2 (13.0)      | 27.0      | 54.20     | 20.70     | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-14NB | ★  | 9/16 (15.0)     | 32.0      | 68.0      | 32.0      | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-16NB | ★  | 5/8 (17.0)      | 32.0      | 68.0      | 32.0      | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-18NB | ★  | 11/16 (19.0)    | 32.0      | 68.0      | 32.0      | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-20NB | ★  | 3/4 (21.0)      | 32.0      | 68.0      | 32.0      | 20.0      | 19.50     | 14.50      | 2.30      |
| 3/0<br>80                           | <input type="checkbox"/> R80-22NB | ★  | 7/8 (23.0)      | 32.0      | 68.0      | 32.0      | 20.0      | 19.50     | 14.50      | 2.30      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 4/0<br>100                          | <input type="checkbox"/> R100-6NB  | ★  | 1/4 (6.5)       | 28.50     | 55.60     | 20.40     | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-8NB  | ★  | 5/16 (8.4)      | 28.50     | 55.60     | 20.40     | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-10NB | ★  | 3/8 (10.5)      | 28.50     | 55.60     | 20.40     | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-12NB | ★  | 1/2 (13.0)      | 28.50     | 55.60     | 20.40     | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-14NB | ★  | 9/16 (15.0)     | 32.0      | 69.0      | 32.0      | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-16NB | ★  | 5/8 (17.0)      | 32.0      | 69.0      | 32.0      | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-18NB | ★  | 11/16 (19.0)    | 32.0      | 69.0      | 32.0      | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-20NB | ★  | 3/4 (21.0)      | 32.0      | 69.0      | 32.0      | 21.0      | 22.10     | 16.40      | 2.70      |
| 4/0<br>100                          | <input type="checkbox"/> R100-22NB | ★  | 7/8 (23.0)      | 32.0      | 69.0      | 32.0      | 21.0      | 22.10     | 16.40      | 2.70      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                            | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|-------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-8NB   | ★  | 5/16 (8.4)      | 36.0      | 66.0      | 23.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-8LNB  | ★  | 5/16 (8.4)      | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-10NB  | ★  | 3/8 (10.5)      | 36.0      | 66.0      | 23.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-10LNB | ★  | 3/8 (10.5)      | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-12NB  | ★  | 1/2 (13.0)      | 36.0      | 66.0      | 23.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-12LNB | ★  | 1/2 (13.0)      | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-14NB  | ★  | 9/16 (15.0)     | 36.0      | 66.0      | 23.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-16NB  | ★  | 5/8 (17.0)      | 36.0      | 66.0      | 23.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-16LNB | ★  | 5/8 (17.0)      | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                            | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|-------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-18NB  | ★  | 11/16 (19.0)    | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-20NB  | ★  | 3/4 (21.0)      | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-22NB  | ★  | 7/8 (23.0)      | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-24NB  | ★  | 15/16 (25.0)    | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 250/300 MCM<br>150                  | <input type="checkbox"/> R150-27NB  | ★  | 1 (28.0)        | 36.0      | 81.0      | 36.0      | 27.0      | 26.60     | 19.50      | 3.20      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-8NB   | ★  | 5/16 (8.4)      | 38.50     | 69.0      | 24.50     | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-10NB  | ★  | 3/8 (10.5)      | 38.50     | 69.0      | 24.50     | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-12NB  | ★  | 1/2 (13.0)      | 38.50     | 69.0      | 24.50     | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-12LNB | ★  | 1/2 (13.0)      | 38.50     | 86.60     | 39.0      | 28.50     | 28.60     | 21.0       | 3.50      |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                           | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-14NB | ★  | 9/16 (15.0)     | 38.50     | 69.0      | 24.50     | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-16NB | ★  | 5/8 (17.0)      | 38.50     | 69.0      | 24.50     | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-18NB | ★  | 11/16 (19.0)    | 38.50     | 86.60     | 39.0      | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-20NB | ★  | 3/4 (21.0)      | 38.50     | 86.60     | 39.0      | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-22NB | ★  | 7/8 (23.0)      | 38.50     | 86.60     | 39.0      | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-24NB | ★  | 15/16 (25.0)    | 38.50     | 86.60     | 39.0      | 28.50     | 28.60     | 21.0       | 3.50      |
| 300/350 MCM<br>180                  | <input type="checkbox"/> R180-27NB | ★  | 1 (28.0)        | 38.50     | 86.60     | 39.0      | 28.50     | 28.60     | 21.0       | 3.50      |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-8NB  | ★  | 5/16 (8.4)      | 44.0      | 72.0      | 24.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-8LNB | ★  | 5/16 (8.4)      | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |

| WIRE RANGE<br>AWG / mm <sup>2</sup> | ITEM NO.                            | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------------------|-------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-10NB  | ★  | 3/8 (10.5)      | 44.0      | 72.0      | 24.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-12NB  | ★  | 1/2 (13.0)      | 44.0      | 72.0      | 24.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-12LNB | ★  | 1/2 (13.0)      | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-14NB  | ★  | 9/16 (15.0)     | 44.0      | 72.0      | 24.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-16NB  | ★  | 5/8 (17.0)      | 44.0      | 72.0      | 24.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-16LNB | ★  | 5/8 (17.0)      | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-18NB  | ★  | 11/16 (19.0)    | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-20NB  | ★  | 3/4 (21.0)      | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200                  | <input type="checkbox"/> R200-22NB  | ★  | 7/8 (23.0)      | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |

| WIRE RANGE<br>AWG / mm² | ITEM NO.                            | UL | STUD SIZE<br>d2 | B<br>(mm) | L<br>(mm) | F<br>(mm) | E<br>(mm) | D<br>(mm) | d1<br>(mm) | t<br>(mm) |
|-------------------------|-------------------------------------|----|-----------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|
| 400/500 MCM<br>200      | <input type="checkbox"/> R200-24NB  | ★  | 15/16 (25.0)    | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 400/500 MCM<br>200      | <input type="checkbox"/> R200-27NB  | ★  | 1 (28.0)        | 44.0      | 91.0      | 37.50     | 31.50     | 32.60     | 24.0       | 4.0       |
| 500/600 MCM<br>325      | <input type="checkbox"/> R325-8NB   | ★  | 5/16 (8.4)      | 50.50     | 88.0      | 33.50     | 35.50     | 37.60     | 28.0       | 4.30      |
| 500/600 MCM<br>325      | <input type="checkbox"/> R325-10NB  | ★  | 3/8 (10.5)      | 50.50     | 88.0      | 33.50     | 35.50     | 37.60     | 28.0       | 4.30      |
| 500/600 MCM<br>325      | <input type="checkbox"/> R325-12NB  | ★  | 1/2 (13.0)      | 50.50     | 88.0      | 33.50     | 35.50     | 37.60     | 28.0       | 4.30      |
| 500/600 MCM<br>325      | <input type="checkbox"/> R325-12LNB | ★  | 1/2 (13.0)      | 50.50     | 105.70    | 45.0      | 35.50     | 37.60     | 28.0       | 4.30      |
| 500/600 MCM<br>325      | <input type="checkbox"/> R325-14NB  | ★  | 9/16 (15.0)     | 50.50     | 88.0      | 33.50     | 35.50     | 37.60     | 28.0       | 4.30      |
| 500/600 MCM<br>325      | <input type="checkbox"/> R325-16NB  | ★  | 5/8 (17.0)      | 50.50     | 88.0      | 33.50     | 35.50     | 37.60     | 28.0       | 4.30      |
| 500/600 MCM<br>325      | <input type="checkbox"/> R325-16LNB | ★  | 5/8 (17.0)      | 50.50     | 105.70    | 45.0      | 35.50     | 37.60     | 28.0       | 4.30      |

|                    |                                    |   |              |       |        |      |       |       |      |      |
|--------------------|------------------------------------|---|--------------|-------|--------|------|-------|-------|------|------|
| 500/600 MCM<br>325 | <input type="checkbox"/> R325-18NB | ★ | 11/16 (19.0) | 50.50 | 105.70 | 45.0 | 35.50 | 37.60 | 28.0 | 4.30 |
| 500/600 MCM<br>325 | <input type="checkbox"/> R325-20NB | ★ | 3/4 (21.0)   | 50.50 | 105.70 | 45.0 | 35.50 | 37.60 | 28.0 | 4.30 |
| 500/600 MCM<br>325 | <input type="checkbox"/> R325-22NB | ★ | 7/8 (23.0)   | 50.50 | 105.70 | 45.0 | 35.50 | 37.60 | 28.0 | 4.30 |
| 500/600 MCM<br>325 | <input type="checkbox"/> R325-24NB | ★ | 15/16 (25.0) | 50.50 | 105.70 | 45.0 | 35.50 | 37.60 | 28.0 | 4.30 |
| 500/600 MCM<br>325 | <input type="checkbox"/> R325-27NB | ★ | 1 (28.0)     | 50.50 | 105.70 | 45.0 | 35.50 | 37.60 | 28.0 | 4.30 |