


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 12/08/06'
B	整理图纸	YCH 07/27/11'	~	


N: HALF OF CONTACTS

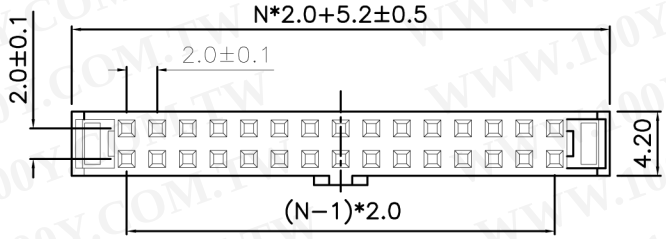

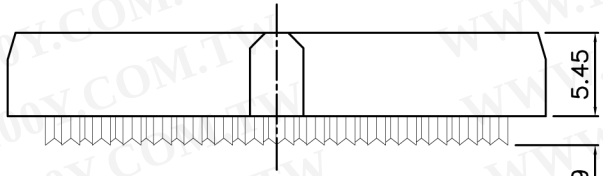


HOUSING WITH CONTACT

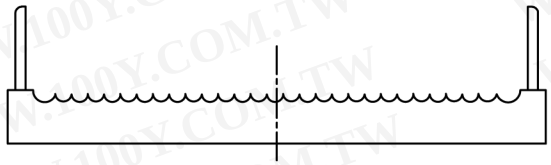

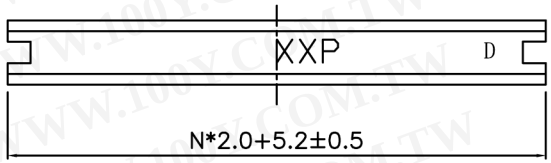


COVER

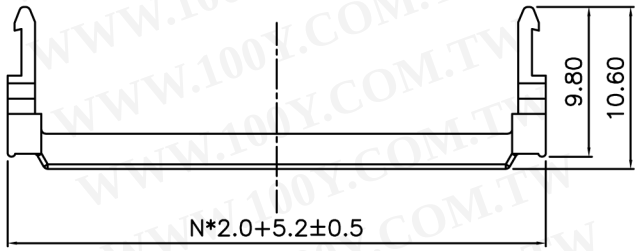

UPPER COVER



勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

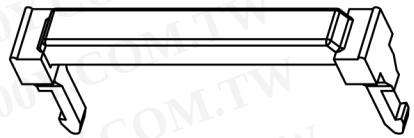

NOTES:

1. MATERIAL
   - 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
   - 1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
   - 2.1 TEMPERATURE RANGE:-40~+105°C.
   - 2.2 CONTACT RESISTANCE:20mΩ max.
   - 2.3 INSULATION RESISTANCE:1000MΩ min.
   - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PART NUMBER: DS1017

DS1017- X X X X X

- HOUSING COLOR
  G: GRAY
  B: BLACK
  L: BLUE
- CONTACT PLATING
  8: FULL GOLD FLASH
  6: FULL TIN
  2: NICKEL+GOLD FLASH
- POLARIZATION
  A: W/
  B: W/O
- STRAIN RELIEF
  M: W/
  N: W/O
- No. OF CONTACTS
  10 12 16 20 22 24 26 30 34 36 40 44 50 56 68

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1017-XXXXX		

PROJECTION		TITLE	IDC SOCKET PITCH 2.0mm WITH 1.0mm FLAT CABLE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1017 SERIES

CONNFLY