

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20


© COPYRIGHT 20

BY -


ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	22NOV2014	DW	CW
	A1	ECR-15-010519	20JUN2015	DW	CW
	A2	ECR-17-014183	27SEP2017	DW	CW

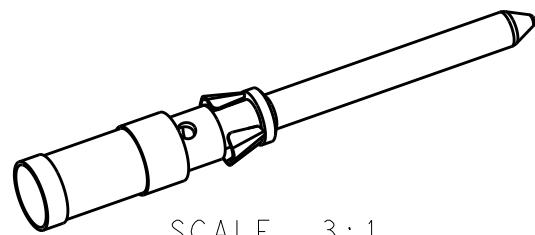

SCALE 3:1

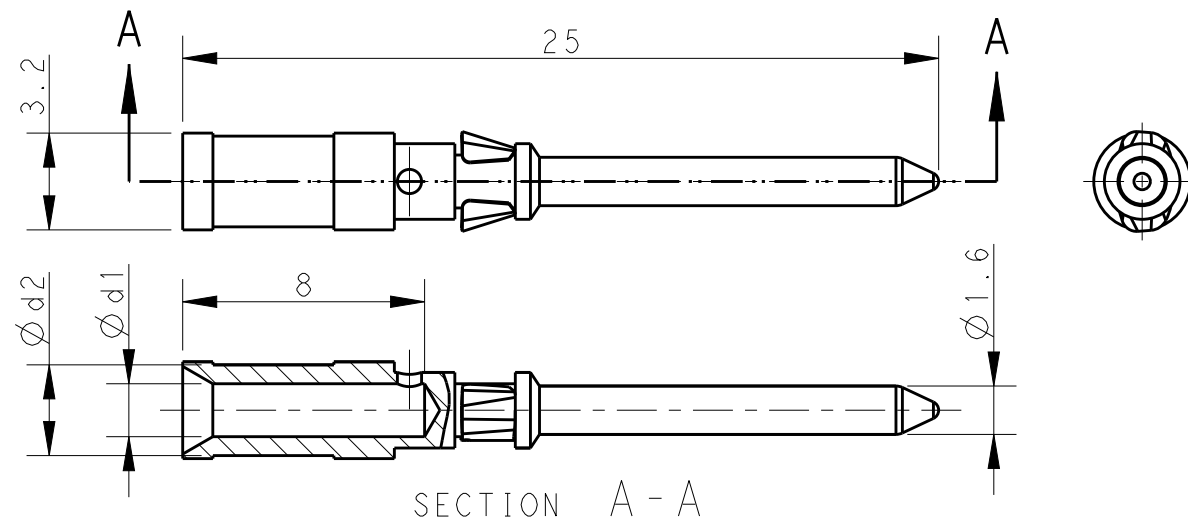1) $\varnothing d1=0.90, 1.10, 1.30,$
 $1.45, 1.75$ 

SECTION A - A

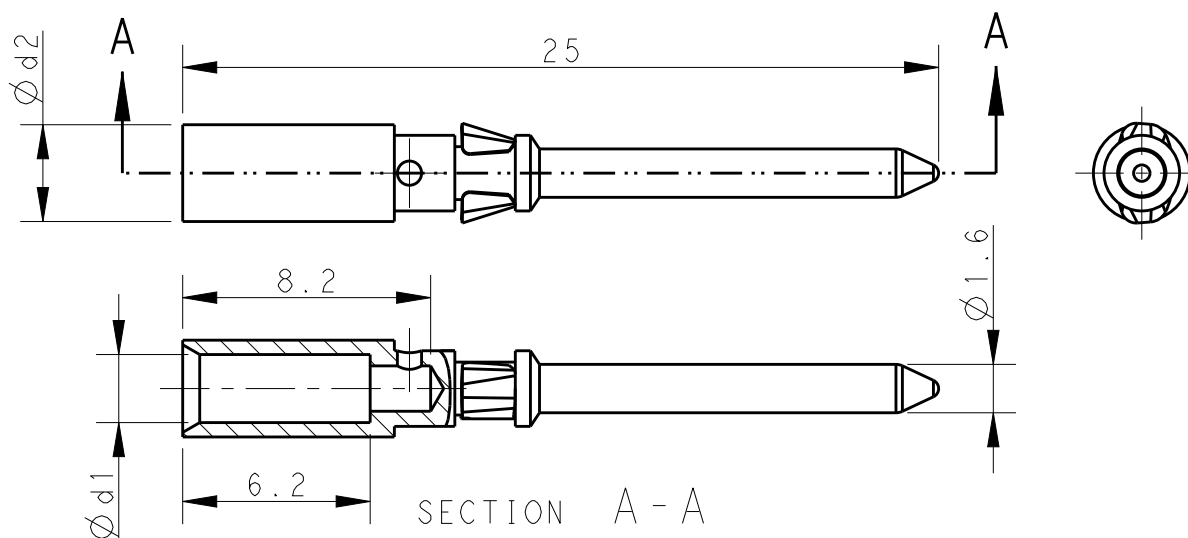2) $\varnothing d1=2.25$ 

SECTION A - A

NOTES:

1. TECHNICAL CHARACTERISTICS:
PIN CONTACT MATERIAL: BRASS
SURFACE PLATING:
SILVER PLATING: $\geq 2\mu m$
GOLD PLATING: $\geq 0.75\mu m$
CONTACT RESISTANCE: $\leq 5 m\Omega$
WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
OPERATION TEMPERATURE: -40-+125°C

注释:

1. 技术参数:
公针材料: 黄铜
表面电镀:
镀银: $\geq 2\mu m$
镀金: $\geq 0.75\mu m$
接触电阻: $\leq 5 m\Omega$
接线范围: 0.14-2.5 mm² (26-14 AWG)
工作温度: -40-+125°C


SILVER PLATING 镀银			GOLD PLATING 镀金			Ø d1	Ø d2	WIRE GAUGE 线规		STRIPPING LENGTH 剥线长度 (mm)
PART NUMBER 料 号	PART DESCRIPTION 描 述		PART NUMBER 料 号	PART DESCRIPTION 描 述				MM²	AWG	
T2020001002-000	CDM-0.3	CDM-0.3,SILVER PLATING DD公针 0.14-0.37mm2, 镀银	T2020011002-000	DDM-0.3	DDM-0.3,GOLD PLATING DD公针 0.14-0.37mm2, 镀金	0.90	2.55	0.14-0.37	26-22	8
T2020001005-000	CDM-0.5	CDM-0.5,SILVER PLATING DD公针 0.5mm2, 镀银	T2020011005-000	DDM-0.5	DDM-0.5,GOLD PLATING DD公针 0.5mm2, 镀金	1.10	2.60	0.5	20	
T2020001008-000	CDM-0.75	CDM-0.75,SILVER PLATING DD公针 0.75mm2, 镀银	T2020011008-000	DDM-0.75	DDM-0.75,GOLD PLATING DD公针 0.75mm2, 镀金	1.30	2.60	0.75	18	
T2020001010-000	CDM-1.0	CDM-1.0,SILVER PLATING DD公针 1.0mm2, 镀银	T2020011010-000	DDM-1.0	DDM-1.0,GOLD PLATING DD公针 1.0mm2, 镀金	1.45	2.60	1.0	18	
T2020001015-000	CDM-1.5	CDM-1.5,SILVER PLATING DD公针 1.5mm2, 镀银	T2020011015-000	DDM-1.5	DDM-1.5,GOLD PLATING DD公针 1.5mm2, 镀金	1.75	3.00	1.5	16	
T2020001025-000	CDM-2.5	CDM-2.5,SILVER PLATING DD公针 2.5mm2, 镀银	T2020011025-000	DDM-2.5	DDM-2.5,GOLD PLATING DD公针 2.5mm2, 镀金	2.25	3.20	2.5	14	6.2

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC $\pm$ -
1 PLC $\pm$ -
2 PLC $\pm$ -
3 PLC $\pm$ -
4 PLC $\pm$ -
ANGLES $\pm$ -

FINISH

-

DWN 22NOV2014

David Wang

CHK 22NOV2014

Chris Wang

APVD 22NOV2014

Xiang Xu

PRODUCT SPEC

108-137042

APPLICATION SPEC

114-137042

WEIGHT

-

Customer Drawing

TE

TE Connectivity

NAME

CDM/DDM
HD/HDD PIN CONTACT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-T20200X10XX000

-

SCALE

4:1

SHEET

1 OF 1

REV

A2