

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT – TE Connectivity ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	REVISED PER ECR-19-009363	20JUN2019	ED	RS

1. USE INSTRUCTION SHEET 408-9089
2. MAXIMUN PANEL THICKNESS: 6.10 [.240]
3. DIELECTRIC MUST WITHSTAND A 6 POUND PUSHOUT FORCE
4. USE WITH CRIMP TOOL 354940-1.
5. USE WITH CRIMP TOOL 220190-1

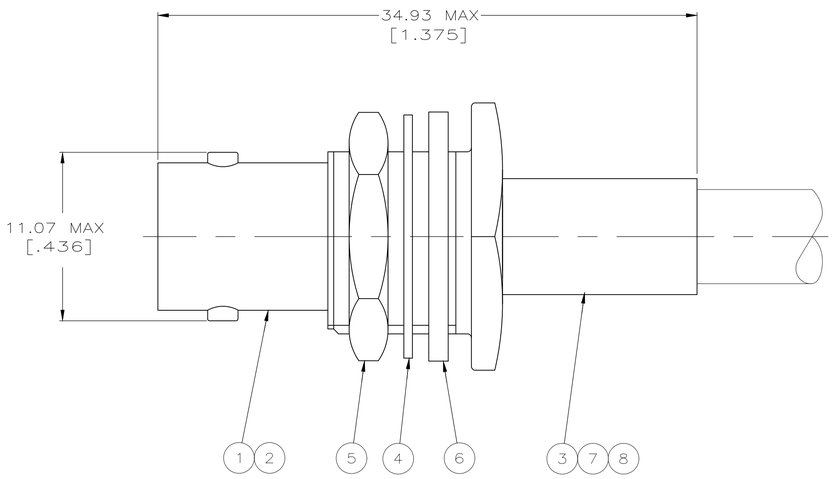


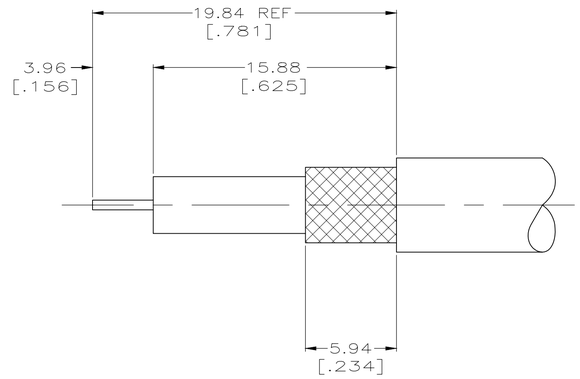

RECOMMENDED STRIP LENGTH

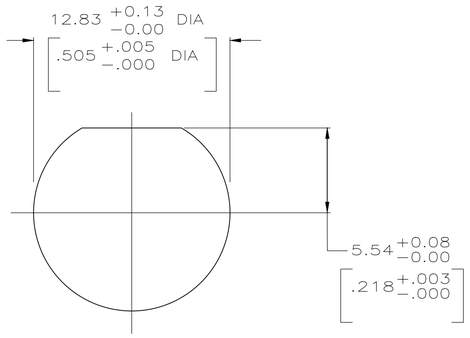

RECOMMENDED PANEL CUTOUT

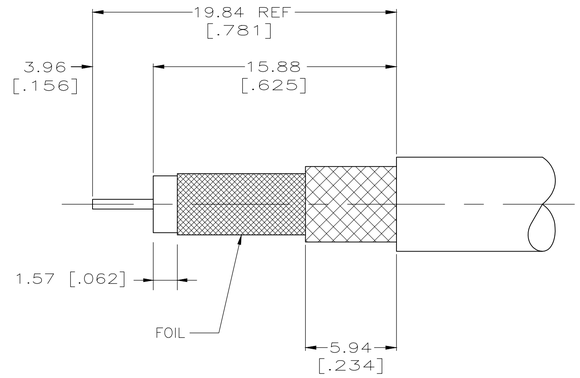

RECOMMENDED STRIP LENGTH FOR 5221221-9

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

	CABLE	DIE SET	⑧ TUBING, PLASTIC QTY=1	⑦ TUBING, METAL QTY=1	⑥ GASKET QTY=1	⑤ JAM NUT QTY=1	④ LOCK WASHER QTY=1	③ FERRULE QTY=1	② CONTACT QTY=1	① JACK ASSEMBLY QTY=1	PART NUMBER
5	AT&T 735A	58174-1	–	–	329633	1-1403077-9	1-329632-2	9-328666-2	221200-9	221255-3	5221221-9
4	BELDEN 9240, 9259, 9266	58085-1	–	–	329633	1-329631-2	1-329632-2	9-50428-0	2-221200-5	221255-2	5221221-7
4	RG-179/U, 179A/U, 179B/U, 187/U, 187A/U	58304-1	227194-2	222001-6	329633	1-329631-2	1-329632-2	9-328666-0	2-221200-0	221255-3	5221221-5
4	RG-59/U, 59A/U, 59B/U	58085-1	–	–	329633	1-329631-2	1-329632-2	9-50428-0	221200-3	221255-2	5221221-2
4	BELDEN 9248 AND MADISON 18AWG	58086-1	–	–	329633	1-329631-2	1-329632-2	9-50427-0	3-221200-2	221255-1	5221221-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.41 [.016]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN J. HAVENER 24JAN2005
CHK J. HAVENER 25JAN2005
APVD J. LIPPERT 25JAN2005
PRODUCT SPEC 108-12095
APPLICATION SPEC –
WEIGHT 0.000000
CUSTOMER DRAWING

TE Connectivity

NAME
JACK,
BULKHEAD, 75 OHM,
BNC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5221221	–

SCALE 5:1 SHEET 1 OF 1 REV A3